

- ▶ Voltage monitoring in 3-phase mains
- ▶ Windowfunction
- ▶ Supply voltage selectable via power modules
- ▶ 1 change-over contact
- ▶ Width 22.5mm
- ▶ Industrial design



Technical data

1. Functions

Voltage monitoring in 3-phase mains monitoring the window between Min and Max with adjustable thresholds and adjustable tripping delay

2. Time ranges

	Adjustment range
Start-up suppression time:	-
Tripping delay:	0.2s 10s

3. Indicators

Green LED ON:	indication of supply voltage
Red LED ON/OFF:	indication of failure of the corresponding threshold
Red LED flashing:	indication of tripping delay of the corresponding threshold
Yellow LED ON/OFF:	indication of relay output

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
 Mounted on DIN-Rail TS 35 according to EN 50022
 Mounting position: any
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
 Tightening torque: max. 1Nm
 Terminal capacity:
 1 x 0.5 to 2.5mm² with/without multicore cable end
 1 x 4mm² without multicore cable end
 2 x 0.5 to 1.5mm² with/without multicore cable end
 2 x 2.5mm² flexible without multicore cable end

5. Input circuit

Supply voltage: 12 to 400V AC	terminals A1-A2 (galvanically separated) selectable via power modules TR2
Tolerance:	according to specification of power module
Rated frequency:	according to specification of power module
Rated consumption:	2VA (1.5W)
Duration of operation:	100%
Reset time:	500ms
Residual ripple for DC:	-
Drop-out voltage:	>30% of the supply voltage
Overvoltage category:	III (according to IEC 60664-1)
Rated surge voltage:	4kV

6. Output circuit

1 potential free change-over contact	
Rated voltage:	250V AC
Switching capacity (distance <5mm):	750VA (3A / 250V)
Switching capacity (distance >5mm):	1250VA (5A / 250V)

Fusing:	5A fast acting
Mechanical life:	20 x 10 ⁶ operations
Electrical life:	2 x 10 ⁵ operations at 1000VA resistive load
Switching frequency:	max. 60/min at 100VA resistive load max. 6/min at 1000VA resistive load (according to IEC 947-5-1)
Overvoltage category:	III (according to IEC 60664-1)
Rated surge voltage:	4kV

7. Measuring circuit

Fusing:	max. 20A (according to UL 508)
Measured variable:	AC Sinus (48 to 63Hz)
Input:	
3~ 115/66V	terminals L1-L2-L3 (G2PW115V10)
3~ 230/132V	terminals L1-L2-L3 (G2PW230V10)
3~ 400/230V	terminals L1-L2-L3 (G2PW400V10)
Overload capacity:	
3~ 115/66V	3~ 173/100V (G2PW115V10)
3~ 230/132V	3~ 345/199V (G2PW230V10)
3~ 400/230V	3~ 600/346V (G2PW400V10)
Input resistance:	
3~ 115/66V	220kΩ (G2PW115V10)
3~ 230/132V	470kΩ (G2PW230V10)
3~ 400/230V	1MΩ (G2PW400V10)
Switching threshold	
Max:	-20% to +30% of U _N
Min:	-30% to +20% of U _N
Overvoltage category:	III (according to IEC 60664-1)
Rated surge voltage:	4kV

8. Accuracy

Base accuracy:	±5% (of maximum scale value)
Frequency response:	-10% to +5% (48 to 63Hz)
Adjustment accuracy:	≤5% (of maximum scale value)
Repetition accuracy:	≤2%
Voltage influence:	≤0.5%
Temperature influence:	≤0.1% / °C

9. Ambient conditions


Ambient temperature:	-25 to +55°C (according to IEC 68-1) -25 to +40°C (according to UL 508)
Storage temperature:	-25 to +70°C
Transport temperature:	-25 to +70°C
Relative humidity:	15% to 85% (according to IEC 721-3-3 class 3K3)
Pollution degree:	3 (according to IEC 60664-1)
Vibration resistance:	10 to 55Hz 0.35mm (according to IEC 68-2-6)
Shock resistance:	15g 11ms (according to IEC 68-2-27)

Functions

If a failure already exists when the device is activated, the output relay remains in off-position and the LED for the corresponding threshold is illuminated.


Window function (WIN)

The output relay switches into on-position (yellow LED illuminated) when the measured voltage (mean value of phase-to-phase voltages) exceeds the value adjusted at the MIN-regulator. When the measured voltage exceeds the value adjusted at the MAX-regulator, the set interval of the tripping delay (DELAY) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relay switches into off-position (yellow LED not illuminated). The output relay again switches into on-position (yellow LED illuminated) when the measured voltage falls below the value adjusted at the MAX-regulator (red LED MAX not illuminated). When the measured voltage falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (DELAY) begins again (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relay switches into off-position (yellow LED not illuminated). The LEDs MIN and MAX are flashing alternating, when the minimum value for the measured voltage was chosen to be greater than the maximum value.

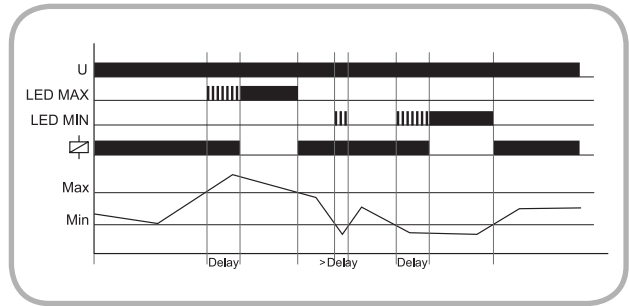


Connections


G2PW400V10 with power modul 24V AC

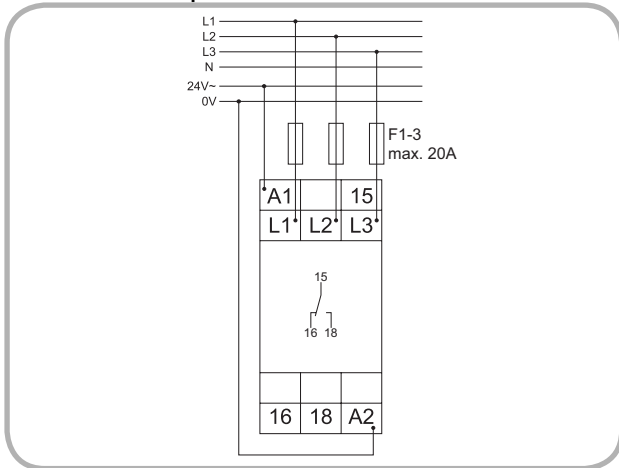


G2PW400V10 with power modul 230V AC

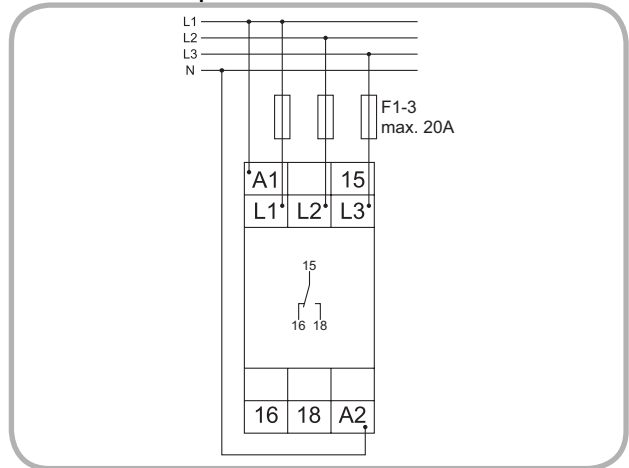

G2PW400V10 with power modul 400V AC

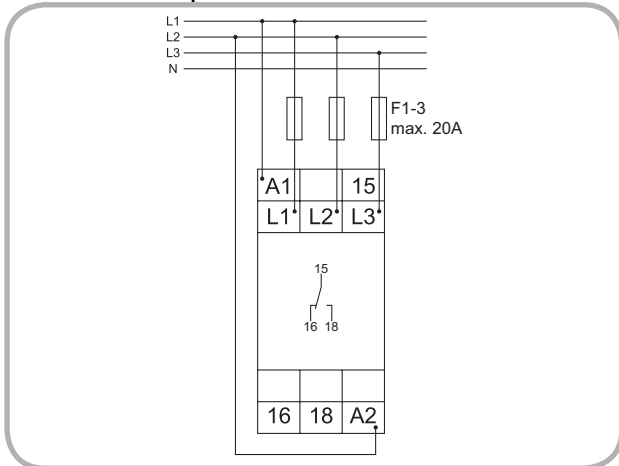

Dimensions

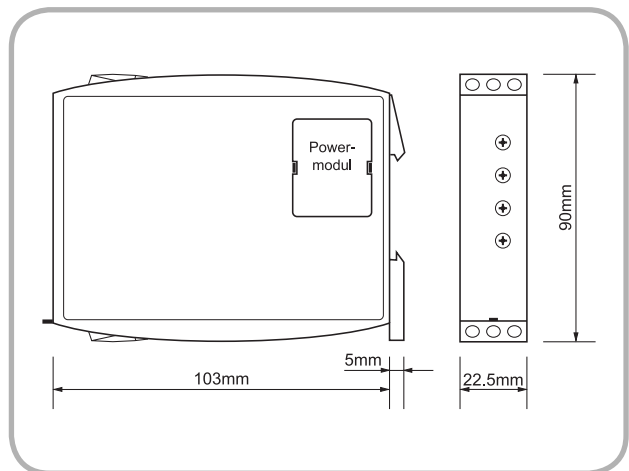

Subject to alterations and errors