

Absolute encoders - singleturn

Standard, ATEX/IECEX – mining
optical

Sendix 7158 / 7178 (shaft / hollow shaft)

CANopen



The Sendix 7158 / 7178 absolute singleturn encoders in a compact 70 mm stainless-steel housing, with a CANopen interface and optical sensor technology have an ATEX/IECEX mining approval.

These shock and vibration-resistant encoders operate flexibly with a resolution of up to 16 bits; they are also available with axial and radial cable outlets.



CANopen



Ex approval



Safety-Lock™



High rotational speed



High protection level



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Short-circuit proof



Reverse polarity protection



Optical sensor

Absolute encoders
singleturn

Compact and safe

- Can be used even when space is tight.
- Minimal installation depth, diameter 70 mm.
- Compact cable outlet axial or radial.
- Remains sealed even in harsh everyday use and ensures highest safety against field breakdowns (IP67 protection).

Explosion protection

- Mining approval.
- "Flame-proof enclosure" construction.
- ATEX with EC type examination certificate.
- IECEx with certificate of conformity (CoC).

Order code Shaft version

8.7158 . 2X2X . 2111 . XXXX
Type a b c d e f 1)

a Flange

2 = clamping / synchronous flange, IP67, ø 70 mm [2.76"]

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat
1 = 12 x 25 mm [0.47 x 0.98"], with keyway
for 4 x 4 mm [0.16 x 0.16"] key

c Interface / power supply

2 = CANopen DS301 V4.02 / 10 ... 30 V DC

d Type of connection

1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']

e Fieldbus profile

21 = CANopen

f Cable length in dm 1)

0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']

Optional on request
- special cable length

Order code Hollow shaft

8.7178 . XX2X . 2111 . XXXX
Type a b c d e f 1)

a Flange

2 = with spring element, short
6 = with stator coupling, IP67, ø 65 mm [2.56"]

b Blind hollow shaft

(insertion depth max. 41.5 mm [1.63"])
1 = ø 12 mm [0.47"]
2 = ø 14 mm [0.55"]

c Interface / power supply

2 = CANopen DS301 V4.02 / 10 ... 30 V DC

d Type of connection

1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']

e Fieldbus profile

21 = CANopen

f Cable length in dm 1)

0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']

Optional on request
- special cable length

1) Not applicable with connection types 1 and 2.

Absolute encoders - singleturn

Standard, ATEX/IECEX – mining optical	Sendix 7158 / 7178 (shaft / hollow shaft)	CANopen
--	--	----------------

Technical data

Explosion protection 7158			Explosion protection 7178		
ATEX			ATEX		
EC type-examination certificate		IBExU 14 ATEX 1047 X	EU type-examination certificate		IBExU 15 ATEX 1057 X
Category		⚡ I M2 Ex d I/IIC T4 - T6 Mb	Category		⚡ I M2 Ex db I/IIC T4/120°C (T4)/T6 Mb
Relevant standards		EN 60079-0:2012; ATEX guideline 94/9/EC	Relevant standards		EN 60079-0:2012 + A11:2013; ATEX guideline 2014/34/EU
IECEX			IECEX		
Certificate of Conformity (CoC)		IECEX IBE 14.0023 X	Certificate of Conformity (CoC)		IECEX IBE 15.0019 X
Category		Ex d I/IIC T4 - T6 Mb	Category		Ex db I/IIC T4/120°C (T4)/T6 Mb
Relevant standards		IEC 60079-0:2011; ATEX guideline 94/9/EC	Relevant standards		IEC 60079-0:2011; IEC 60079-1:2014
Mechanical characteristics			Electrical characteristics		
Maximum speed	shaft	6000 min ⁻¹ (continuous)	Power supply		10 ... 30 V DC
	hollow shaft	3000 min ⁻¹ (continuous)	Current consumption (no load)		max. 90 mA
Starting torque – at 20°C [68°F]		< 0.05 Nm	Reverse polarity protection for power supply		yes
Mass moment of inertia		4.0 x 10 ⁻⁶ kgm ²	CE compliant acc. to		EMC guideline 2014/30/EU RoHS guideline 2011/65/EU
Load capacity of shaft	radial	80 N	EMC		
	axial	40 N			
Weight		approx. 2.8 kg [98.77 oz]	Relevant standards		
Protection acc. to EN 60529		IP67			
Ambient temperature		-40°C ... +60°C [-40 ... +140°F] Please note the specifications for temperature class in EC type-examination certificate!			
Material	shaft	stainless steel			
	flange / housing	stainless steel			
	cable	PUR			
Shock resistance					
acc. to EN/IEC 60068-2-27		1000 m/s ² , 6 ms			
Vibration resistance					
acc. to EN/IEC 60068-2-6		100 m/s ² , 55 ... 2000 Hz			

Absolute encoders - singleturn

Standard, ATEX/IECEx – mining optical	Sendix 7158 / 7178 (shaft / hollow shaft)	CANopen
---------------------------------------	---	---------

Interface characteristics CANopen	
Resolution	1 ... 65536 (16 bit), scalable default: 8192 (13 bit)
Code	binary
Interface	CAN high-speed acc. to ISO 11898, Basic- and Full-CAN, CAN specification 2.0 B
Protocol	CANopen profile DS406 V3.2 with manufacturer-specific add-ons
Baud rate	10 ... 1000 kbit/s software configurable
Node address	1 ... 127 software configurable
Switchable termination	software configurable

General information about CANopen

The CANopen encoders support the latest CANopen communication profile according to DS301 V4.02 .

In addition, device-specific profiles like the encoder profile DS406 V3.2 are available.

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode and a High Resolution Sync Protocol. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CANbus. When switching the device on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure.

As output values **position**, **speed**, **acceleration** as well as the **working area status** may be combined freely as PDO (PDO mapping)

CANopen communication profile DS301 V4.02

Among others, the following functionality is integrated:

Class C2 functionality

- NMT slave.
- Heartbeat protocol.
- High resolution sync protocol.
- Identity object.
- Error behavior object.
- Variable PDO mapping self-start programmable (power on to operational), 3 Sending PDO's.
- Node address, baud rate and CANbus termination programmable.

CANopen encoder profile DS406 V3.2

The following parameters can be programmed:

- Event mode.
- Units for speed selectable (steps/sec or min⁻¹).
- Factor for speed calculation (e.g. measuring wheel circumference) Integration time for speed value of 1...32.
- 2 work areas with 2 upper and lower limits and the corresponding output states.
- Variable PDO mapping of position, speed, acceleration, working area status.
- Extended failure management for position sensing with integrated temperature control.
- User interface with visual display of bus and failure status - 3 LED's.
- Optional - 32 CAMs programmable.
- Customer-specific memory - 16 Bytes.

Terminal assignment

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)								
2	1, 2, A, B	Signal:	0 V	+V	CAN_H	CAN_L	CAN_GND	CAN_H	CAN_L	CAN_GND
		Cable marking:	1	2	4	5	6	7	8	9

Absolute encoders - singleturn

**Standard, ATEX/IECEx – mining
optical**

Sendix 7158 / 7178 (shaft / hollow shaft)

CANopen


Dimensions shaft version

Dimensions in mm [inch]

Clamping / synchronous flange, $\varnothing$ 70 [2.76]

Shaft type 1 with axial cable outlet

- 1 9 x M4, 10 [0.39] deep
- 2 Keyway for DIN 6885-A-4x4x25 key

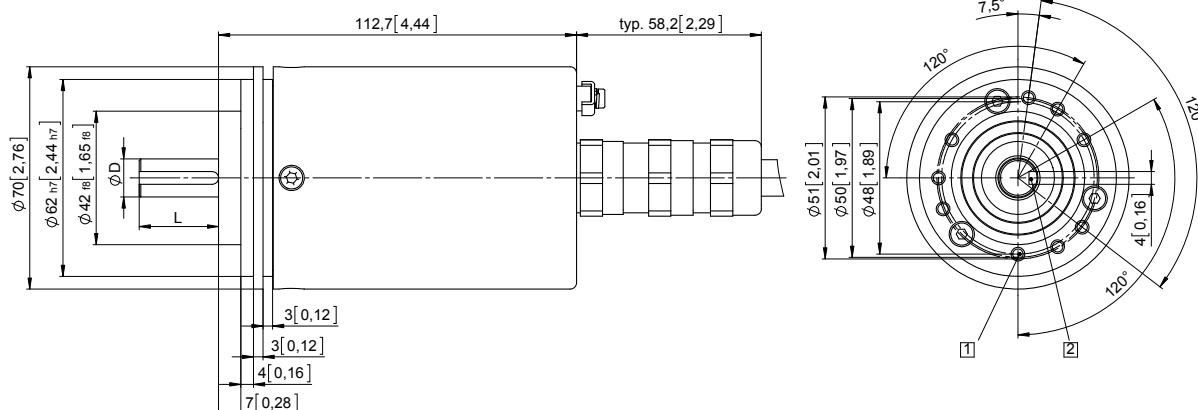


D	Fit	L
12 [0.47]	g6	25 [0.98]

Clamping / synchronous flange, $\varnothing$ 70 [2.76]

Shaft type 2 with radial cable outlet

- 1 9 x M4, 10 [0.39] deep

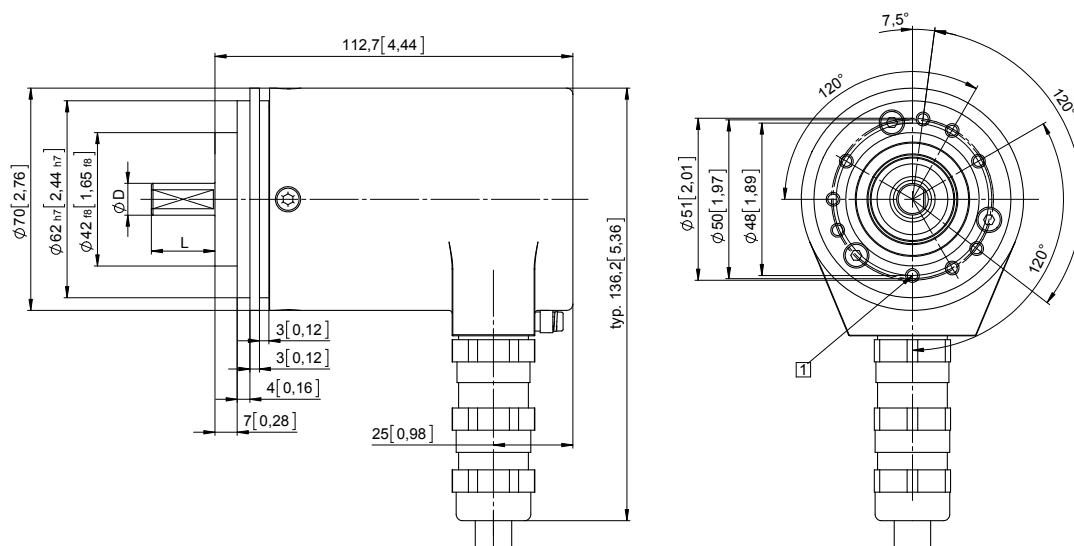

D	Fit	L
10 [0.39]	f7	20 [0.79]

Absolute encoders - singleturn

**Standard, ATEX/IECEx – mining
optical**

Sendix 7158 / 7178 (shaft / hollow shaft)



CANopen

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, short Flange type 2

- 1 9 x M4, 10 [0.39] deep
- 2 Slot spring element,
recommendation:
cylindrical pin DIN 7, $\varnothing$ 4 [0.16]
- 3 Recommended torque for the
clamping ring 2.5 Nm

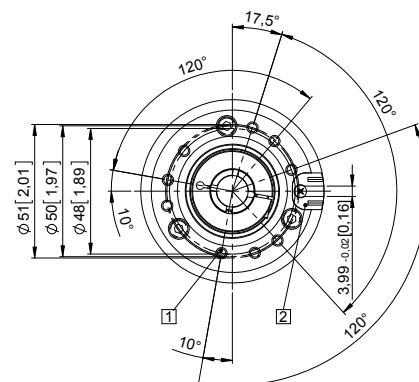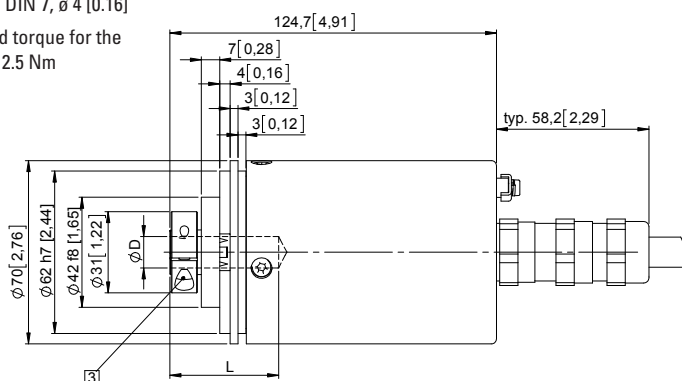



D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]

L = insertion depth max. blind hollow shaft

Flange with stator coupling, $\varnothing$ 65 [2.56]

Flange type 6

- 1 Recommended torque for the
clamping ring 2.5 Nm

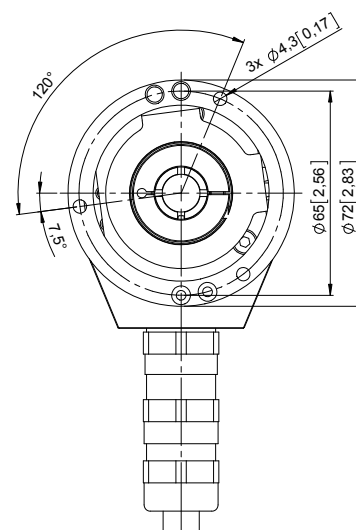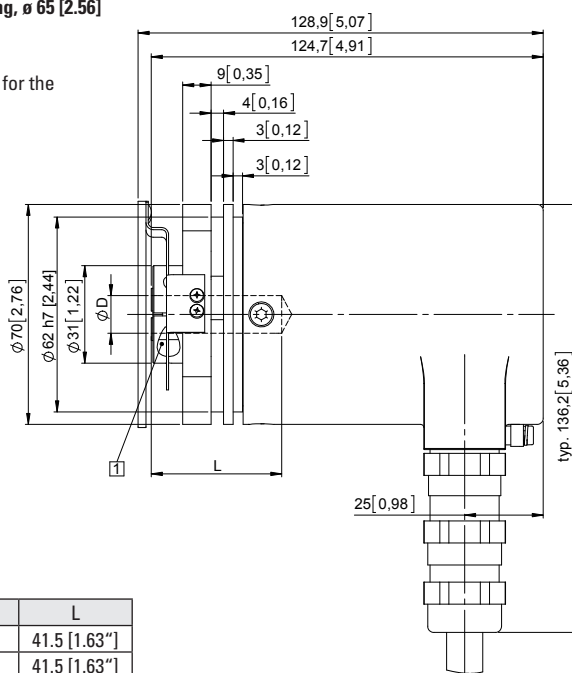

D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]

L = insertion depth max. blind hollow shaft