


Absolute encoders - singleturn

Standard, ATEX/IECEX – mining
optical

Sendix 7158 / 7178 (shaft / hollow shaft)

PROFIBUS DP

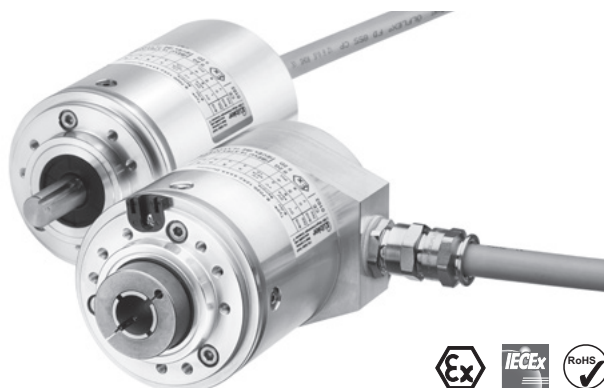

The Sendix 7158 / 7178 absolute singleturn encoders in a compact 70 mm stainless-steel housing, with a PROFIBUS interface and optical sensor technology have an ATEX/IECEX mining approval.

These shock and vibration-resistant encoders operate flexibly with a resolution of up to 16 bits; they are also available with axial and radial cable outlets.



Ex approval



Safety-Lock™



High rotational speed



High protection level



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Short-circuit proof



Reverse polarity protection



Optical sensor

Absolute encoders
singleturn

Compact and safe

- Can be used even when space is tight.
- Minimal installation depth, diameter 70 mm.
- Compact cable outlet axial or radial.
- Remains sealed even in harsh everyday use and ensures highest safety against field breakdowns (IP67 protection).

Explosion protection

- Mining approval.
- "Flame-proof enclosure" construction.
- ATEX with EC type examination certificate.
- IECEx with certificate of conformity (CoC).

Order code

Shaft version

8.7158 . 2X3X . 3111 . XXXX
Type a b c d e f 1)

a Flange

2 = clamping / synchronous flange, IP67, ø 70 mm [2.76"]

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat
1 = 12 x 25 mm [0.47 x 0.98"], with keyway
for 4 x 4 mm [0.16 x 0.16"] key

c Interface / power supply

3 = PROFIBUS DP V0 / 10 ... 30 V DC

d Type of connection

1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']

e Fieldbus profile

31 = PROFIBUS DP V0 encoder profile class 2

f Cable length in dm 1)

0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']

Optional on request
- special cable length

Order code

Hollow shaft

8.7178 . XX3X . 3111 . XXXX
Type a b c d e f 1)

a Flange

2 = with spring element, short
6 = with stator coupling, IP67, ø 65 mm [2.56"]

b Blind hollow shaft

(insertion depth max. 41.5 mm [1.63"])
1 = ø 12 mm [0.47"]
2 = ø 14 mm [0.55"]

c Interface / power supply

3 = PROFIBUS DP V0 / 10 ... 30 V DC

d Type of connection

1 = axial cable, 2 m [6.56'] PUR
2 = radial cable, 2 m [6.56'] PUR
A = axial cable, length > 2 m [6.56']
B = radial cable, length > 2 m [6.56']

e Fieldbus profile

31 = PROFIBUS DP V0 encoder profile class 2

f Cable length in dm 1)

0050 = 5 m [16.40']
0100 = 10 m [32.81']
0150 = 15 m [49.21']

Optional on request
- special cable length

1) Not applicable with connection types 1 and 2.

Absolute encoders - singleturn

Standard, ATEX/IECEX – mining optical	Sendix 7158 / 7178 (shaft / hollow shaft)	PROFIBUS DP
--	--	--------------------

Technical data

Explosion protection 7158		Explosion protection 7178	
ATEX		ATEX	
EC type-examination certificate	IBExU 14 ATEX 1047 X	EU type-examination certificate	IBExU 15 ATEX 1057 X
Category	⚡ I M2 Ex d I/IIC T4 - T6 Mb	Category	⚡ I M2 Ex db I/IIC T4/120°C (T4)/T6 Mb
Relevant standards	EN 60079-0:2012; ATEX guideline 94/9/EC	Relevant standards	EN 60079-0:2012 + A11:2013; ATEX guideline 2014/34/EU
IECEX		IECEX	
Certificate of Conformity (CoC)	IECEX IBE 14.0023 X	Certificate of Conformity (CoC)	IECEX IBE 15.0019 X
Category	Ex d I/IIC T4 - T6 Mb	Category	Ex db I/IIC T4/120°C (T4)/T6 Mb
Relevant standards	IEC 60079-0:2011; IEC 60079-1:2007	Relevant standards	IEC 60079-0:2011; IEC 60079-1:2014

Mechanical characteristics		Electrical characteristics	
Maximum speed	shaft 6000 min ⁻¹ (continuous) hollow shaft 3000 min ⁻¹ (continuous)	Power supply	10 ... 30 V DC
Starting torque – at 20°C [68°F]	< 0.05 Nm	Current consumption (no load)	max. 110 mA
Mass moment of inertia	4.0 x 10 ⁻⁶ kgm ²	Reverse polarity protection for power supply	yes
Load capacity of shaft	radial 80 N axial 40 N	CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU
Weight	approx. 2.8 kg [98.77 oz]	EMC	
Protection acc. to EN 60529	IP67	Relevant standards	EN 55011 class B:2009 / A1:2010 EN 61000-6-2:2005 / AC:2005 EN 61000-6-3:2007 / A1:2011 EN 61326-1:2013
Ambient temperature	-40°C ... +60°C [-40 ... +140°F] Please note the specifications for temperature class in EC type-examination certificate!		
Material	shaft stainless steel flange / housing stainless steel cable PUR		
Shock resistance	acc. to EN/IEC 60068-2-27 1000 m/s ² , 6 ms		
Vibration resistance	acc. to EN/IEC 60068-2-6 100 m/s ² , 55 ... 2000 Hz		

Interface characteristics PROFIBUS DP		Profibus encoder-profile V1.1	
Resolution	1 ... 65536 (16 bit), scalable default: 8192 (13 bit)	The PROFIBUS DP device profile describes the functionality of the communication and the manufacturer-specific component within the PROFIBUS fieldbus system. The encoder profile applies to encoders and defines the individual objects independently of the manufacturer. In addition, the profile makes provision for additional extended functions specific to the manufacturer. The use of PROFIBUS compatible devices ensures that the systems of today are ready to meet the demands of the future.	
Code	binary	The following parameters can be programmed	
Interface	specification according to PROFIBUS DP 2.0 / standard (DIN 19245 Part 3) / RS485 driver galvanically isolated	- Direction of rotation. - Scaling – number of steps per revolution. - Preset value. - Diagnostics mode.	
Protocol	Profibus encoder profile V1.1 class 1 and class 2 with manufacturer-specific add-ons	The following functionality is integrated	
Baud rate	maximum 12 Mbit/s	- Galvanic isolation of the bus stage with DC/DC converter. - Line driver acc. to RS485 max. 12 MB. - Full class 1 and class 2 functionality. - Speed value.	
Device address	software controlled setting of the device address via the SSA-service with a class 2 master; default address: 125		
Termination	active termination can only be switched on externally		

Terminal assignment

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)								
3	1, 2, A, B	Signal:	0 V	+V	PB_A IN	PB_B IN	BUS_GND	BUS_VDC	PB_A OUT	PB_B OUT
		Cable marking:	1	2	4	5	6	7	8	9

Absolute encoders - singleturn

Standard, ATEX/IECEx – mining optical

Sendix 7158 / 7178 (shaft / hollow shaft)

PROFIBUS DP


Dimensions shaft version

Dimensions in mm [inch]

Clamping / synchronous flange, ø 70 [2.76]

Shaft type 1 with axial cable outlet

- 1 9 x M4, 10 [0.39] deep
2 Keyway for DIN 6885-A-4x4x25 key

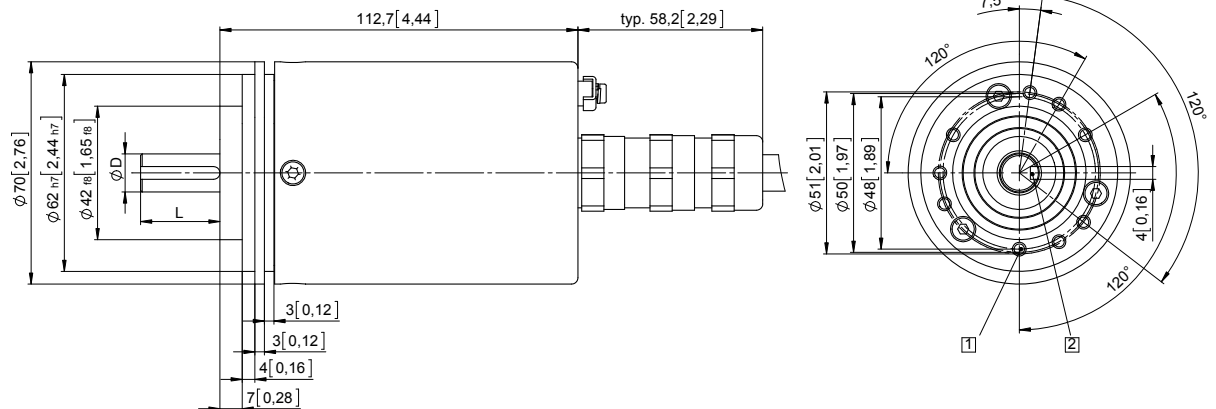


D	Fit	L
12 [0.47]	q6	25 [0.98]

Clamping / synchronous flange, ø 70 [2.76]

Shaft type 2 with radial cable outlet

- 1 9 x M4, 10 [0.39] deep

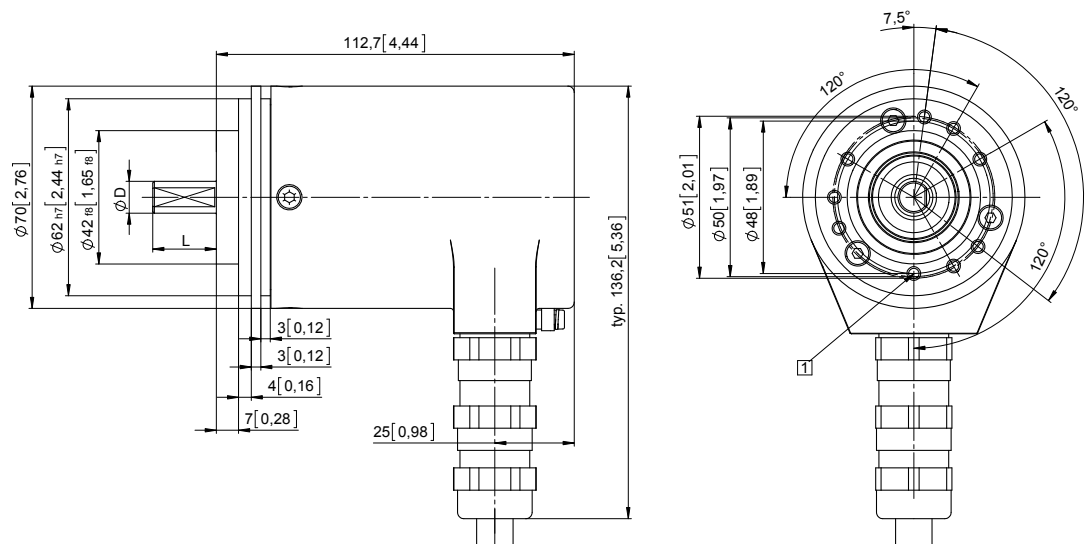

D	Fit	L
10 [0.39]	f7	20 [0.79]

Absolute encoders - singleturn

**Standard, ATEX/IECEx – mining
optical**

Sendix 7158 / 7178 (shaft / hollow shaft)



PROFIBUS DP

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, short Flange type 2

- 1 9 x M4, 10 [0.39] deep
- 2 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing$ 4 [0.16]
- 3 Recommended torque for the clamping ring 2.5 Nm

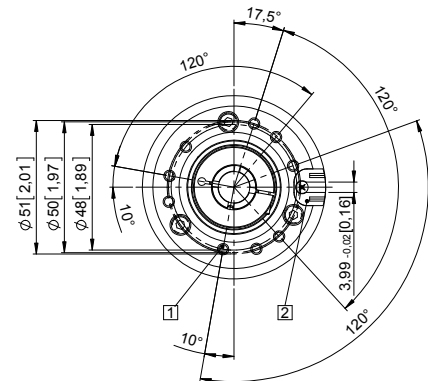
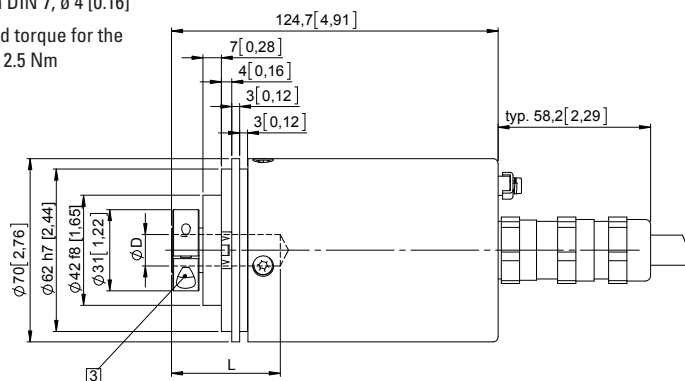


D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]

L = insertion depth max. blind hollow shaft

Flange with stator coupling, $\varnothing$ 65 [2.56] Flange type 6

- 1 Recommended torque for the clamping ring 2.5 Nm

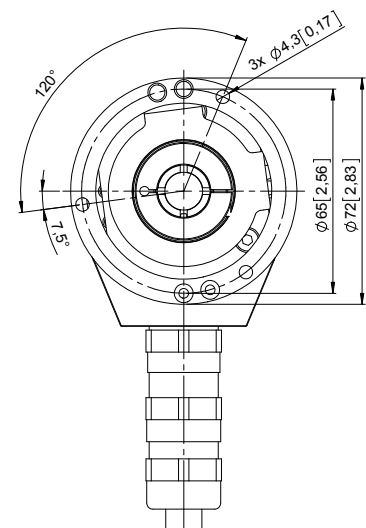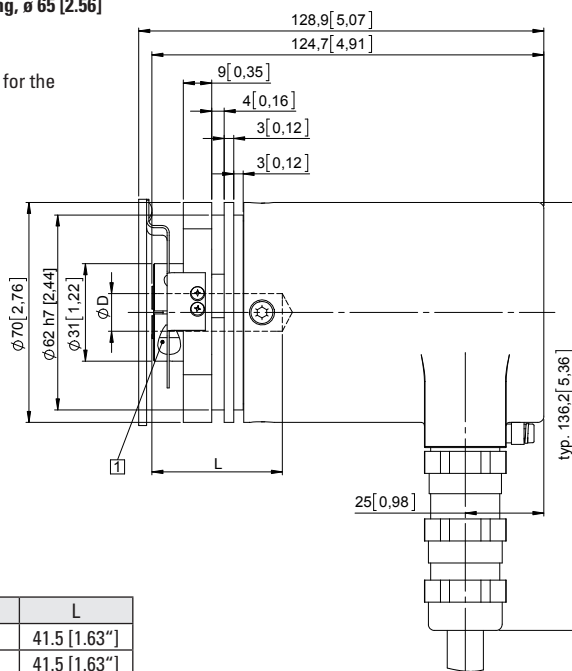

D	Fit	L
12 [0.47]	H7	41.5 [1.63"]
14 [0.55]	H7	41.5 [1.63"]

L = insertion depth max. blind hollow shaft