



W EEx e increased safety motors

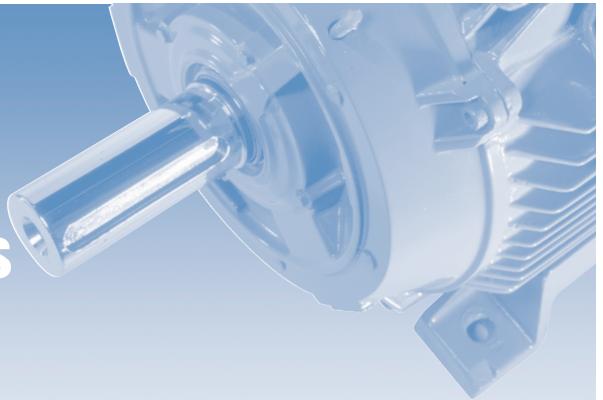

Frames 80 - 355L

EEx e increased safety motors

80 - 355L

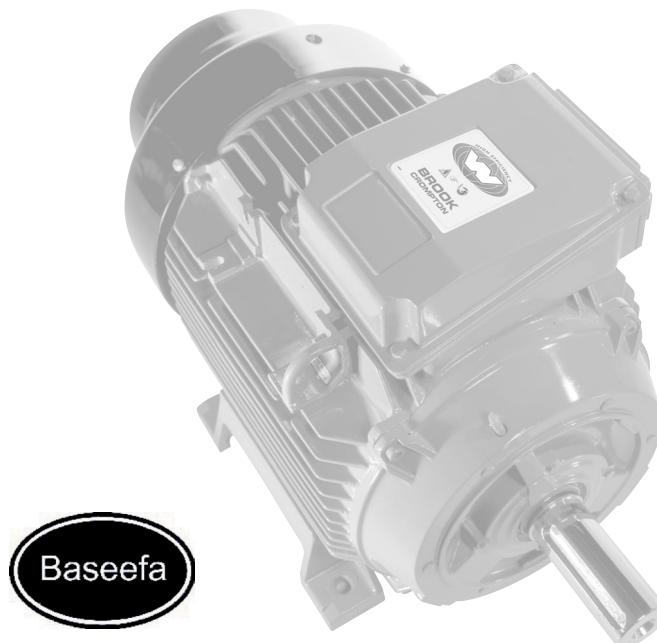

Brook Crompton

Brook Crompton is a leading manufacturer of electric motors for the global industrial market, with motor solutions which benefit a wide range of customers.

Brook Crompton products are used in many industrial activities including water treatment, building services, chemical/petrochemicals, general processing and manufacturing. Motors drive fans, pumps, compressors and mechanical equipment.

Brook Crompton incorporates many well known names including Brook Motors, Crompton Parkinson, Electrodrives, Newman, Bull Electric and Hawker Siddeley Electric Motors.

Extensive stocks of motors are held around the world, backed-up by a network of distributors, ensuring excellent local support wherever needed.

Brook Crompton have a market leading hazardous motor range covering the following protection concepts:-

- Flameproof EEx d, de
- Increased Safety EEx e
- Non-sparking, EEx nA
- Dust Ignition Protection

Quality assurance

Stringent quality procedures are observed from first design to finished product in accordance with the ISO9001 documented quality systems.

All Brook Crompton factories have been assessed to meet these requirements, a further assurance that only the highest possible standards of quality are accepted.

W EEx e increased safety motors

With over 90 years of technical and design experience Brook Crompton are able to ensure the correct selection of motors for any application, taking into full account the two most important factors to be considered - safety and economy.

The W EEx e motor range covers products with outputs from 0.09kW to 260kW in frame sizes 80 to 355L.

Motors are designed and manufactured in factories that are assessed by a European notified body (eg Baseefa (2001) Ltd), meeting rigorous quality controls through Quality Assurance Notification (QAN0165, QAN5233).

Benefits include:

- high efficiency
- low noise levels
- 2-year warranty
- Multi-mount
- Eff1 basic design

Efficiency

Brook Crompton are an approved manufacturer of ac electric motors within the UK Government's Enhanced Capital Allowance (ECA) scheme. A wide range of single and multi-speed motors are included on the UK Energy Technology List. Please check the ECA scheme website: www.eca.gov.uk at time of purchase for current listing.

ATEX

All W EEx e increased safety motors are fully compliant with the requirements of ATEX Directive (94/9/EC).

Standards and environment

Standards

Standards		
EEx e motors can be manufactured to the international standards listed below:		
Region	International IEC	Europe EN
Outputs	IEC 60034-1	EN 50347
Increased Outputs		BS 5000 Part 10 App A
Performance	IEC 60034-1	EN60034-1
Dimensions	IEC 60072-1	EN50347
Mounting	IEC 60034-7	EN60034-7
Degrees of IP protection	IEC 60034-5	EN60034-5
Increased safety 'e'	IEC60079-0 IEC60079-7	EN 50014 EN 50019

 current motor complies  future harmonised standards

Environment

Enclosure

All motors have degrees of IP protection as defined in EN 60034-5.

Motor cooling

Motors are cooled in accordance with EN 60034-6. The normal arrangement is IC411 (Totally Enclosed Fan Ventilated) via a fan mounted at the non-drive end. Alternative methods of cooling available on request.

European directives

Four European directives apply in varying degrees to ac induction motors. Brook Crompton comply in the following manner:

Compliance with European directives applying to AC induction motors				
Directives	Low voltage (LV)	Machinery (MD)	Electromagnetic compatibility (EMC)	ATEX
Reference numbers	73/23/EEC 93/68/EEC	89/392/EEC 91/368/EEC 93/44/EEC 93/68/EEC	89/336/EEC 92/31/EEC 93/68/EEC	94/9/EC
Motor CE marked	Yes	No	No	YES
Standards	EN 60034	Not applicable	EN 60034-1	EN 50014 EN 50019
Documentation for customers' technical file	Declaration of conformity	Certificate of incorporation	Statement ⁽¹⁾	Declaration of conformity
Safety instructions with every motor	Yes	Yes	Yes	Yes
Comment	Relevant electrical equipment operating between 50 to 1000 volts AC	Statement ⁽²⁾	Component	Hazardous atmosphere equipment - mandatory after July 2003

⁽¹⁾ Motors operating from a correctly applied, sinusoidal (AC) supply meet the requirements of the EMC directive and are within the limits specified in standard EN 60034-1

⁽²⁾ When installed in accordance with our customer safety and installation and maintenance instructions, they can be put into service only when the machinery into which they are being incorporated, has been declared to be in conformity with the machinery directive in accordance with Article 4(2) and Annex IIb of that Directive (98/37/EEC)

EEx e motor specification

W EEx e increased safety motors

Frame Sizes W-DF80 to W-DF355.

Group II suitable for use in Zone 1.

Code: EEx e II, T3

Type e - Increased safety

These motors are not flameproof and not built to withstand an internal explosion. They are designed to ensure safety by means of a number of special features to ensure freedom from arcs, sparks or dangerous surface temperatures.

They resemble standard motors in appearance but have special increased safety terminals within an IP55 terminal box. The main features of the increased safety motor are:

- Special attention to air gap concentricity and clearance of all rotating parts.
- Components subject to impact tests.
- Temperature rise 10°C lower than permitted maximum for that class of insulation.
- Maximum surface temperature T3 (200°C)
- Compliance with t_E characteristics
- Special terminal board to accommodate specified creepage and clearances
- Terminal box with IP55 enclosure
- Baseefa Certified


The maximum surface temperature T applies to all surfaces of the motor, both internal and external. Under locked rotor conditions, the rotor temperature in certain designs increases faster than that of the stator windings. In either event this is catered for in conjunction with compliance with the t_E time.

t_E Time

This is defined as the time taken for a.c. windings when carrying the starting current I_A to be heated up from temperature reached in rated service and at maximum ambient temperature to the limiting temperature.

In the graph (top middle), OA represents the maximum ambient temperature and OB is that reached in normal working. If a fault should occur and the rotor becomes locked, then the conditions shown in part 2 of the graph will apply. The motor temperature will increase very rapidly to OC which is just less than the T classification for the motor.

The motor will reach point OC in time t_E . Control gear must be provided to disconnect the motor from the supply within this time t_E . These motors are Baseefa Certified and suitable for use in Zone 1 areas and have a maximum temperature of T3. They are intended for S1 duty, i.e. continuous running and are unsuitable for those involving frequent starts/stops or long run-up times.

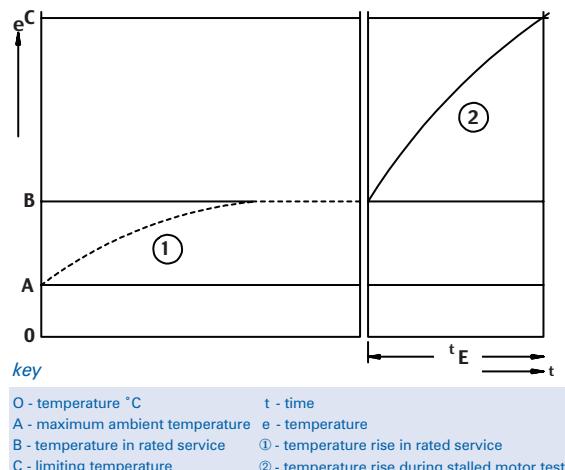

Temperature rise and outputs

Reduced winding temperature rises apply to EEx e motors according to the insulation system used. For Class B this is 70°C by resistance i.e. 10°C less than normal.

Outputs are detailed on pages 6 to 13, Class T3.

Motors can be supplied with increased outputs by using Class F temperature rise (95°C). Details available on application.

Terminal box

Terminal box positions available

Frame size	Top	LHS	RHS
W-DF80-90	-	Alternative	Standard
W-DF100-180	Alternative	Alternative	Standard
W-DF200-355	Standard	Alternative	Alternative


(looking on drive end)

Impact covers

Designed to prevent the ingress of falling foreign bodies, impact covers are fitted on motors when mounted vertically, shaft down.

See page 23.

Certification

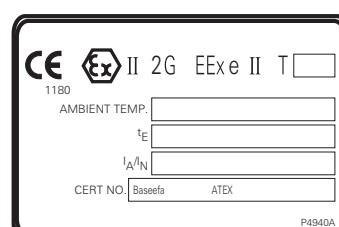

EEx e motor certification plate

Component approval numbers

Frame size	Certificate No
W-DF80 to W-DF180	BAS00ATEX
W-DF200 to W-DF355L	2102U

Dual zones

Some installations may be subjected to more than one type of hazard. The presence of gases and vapours etc may occur with combustible dusts. Under these circumstances, it is possible to supply motors with certification for both hazards. Further details are available from Brook Crompton.

Terminal pin cable capacity and terminal nut tightening torque

Frame size	T box size	Cable capacity (mm ²)		Tightening torque (Nm)	
		Mains terminals	Aux terminals	Mains terminals	Aux terminals
80-100	80-100	4 (M4)	4	1.5	0.5-0.8
	112-132	10 (M5)	4	3	0.5-0.8
112-132	112-132	10 (M5)	4	3	0.5-0.8
	160-180	16 (M6)	4	5	0.5-0.8
160-180	160-180	16 (M6)	4	5	0.5-0.8
200L-280S	200-280S	95 (M10)	2.5	26	1
280M-355L	280M-355L	300 (M10)	2.5	26	1

Marking


Marking

Typical marking is as shown below

CE 0600 Ex II 2G EEx e II T3

and has the following meaning:

Compliant with European Directives

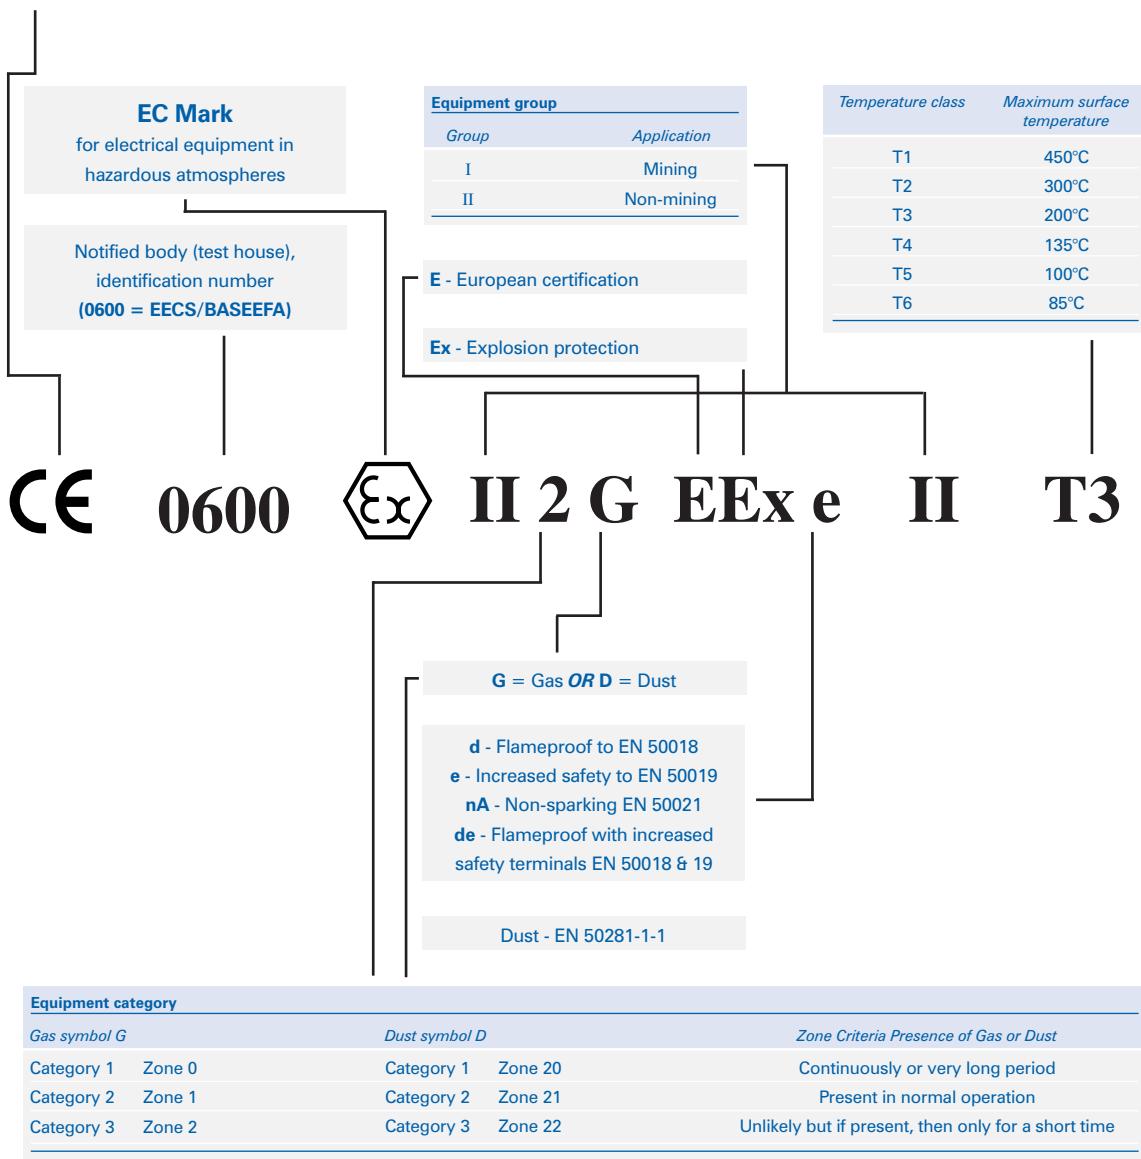

Dust are marked differently, eg:

CE 0600 Ex II 2 D T125°C

T125°C = certified external surface temperature

Performance data

3000 min⁻¹ (2 pole), T3

Rated power P _N kW (hp)	Full load speed in revolutions per minute n min ⁻¹	Frame reference and size	Full load current at rated voltage I _N 400 V A	Efficiency η 1.0 P _N 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E s	J kgm ²	L _{PA} dB(A)
0.75 (1)	2850	W-DF80ME	1.7	{ 79.0 80.0 77.5 0.79 0.67 }	{ 0.84 0.79 0.75 0.70 }	2.5	2.0	5.7	2.2	1.7	9.0	0.0014	64
1.1 (1.5)	2880	W-DF80MM	2.36	{ 81.5 81.5 79.0 0.85 0.78 0.70 }	{ 0.85 0.78 0.70 }	3.7	3.6	7.5	2.9	2.3	7.3	0.0012	64
1.3 (1.7)	2850	W-DF90SJ	2.73	{ 79.5 80.5 79.0 0.89 0.84 0.76 }	{ 0.89 0.84 0.76 }	4.4	2.5	6.8	2.5	2.2	6.5		64
1.85 (2.5)	2880	W-DF90LS	3.9	{ 86.0 86.5 86.0 0.83 0.77 0.67 }	{ 0.83 0.77 0.67 }	6.1	3.2	8.4	3.2	2.8	5.8	0.0016	64
2.5 (3.4)	2880	W-DF100LM	4.8	{ 85.0 86.0 85.0 0.92 0.90 0.85 }	{ 0.92 0.90 0.85 }	8.3	2.8	7.6	3.0	2.5	8.3	0.0055	60
3.3 (4.4)	2860	W-DF112MS	6.3	{ 87.0 88.5 89.0 0.94 0.93 0.88 }	{ 0.94 0.93 0.88 }	11	2.3	7.4	2.6	2.0	6.3		60
4.6 (6.2)	2900	W-DF132SF	8.6	{ 88.5 89.0 88.0 0.91 0.89 0.83 }	{ 0.91 0.89 0.83 }	15	2.4	8.3	2.7	2.1	6.9		66
5.5 (7.5)	2900	W-DF132SM	10	{ 89.5 90.5 89.5 0.93 0.91 0.86 }	{ 0.93 0.91 0.86 }	18	2.3	8.2	2.6	2.0	5.7		66
7.5 (10)	2935	W-DF160MF	13.9	{ 89.5 89.5 88.0 0.92 0.90 0.86 }	{ 0.92 0.90 0.86 }	24	2.7	6.8	2.9	2.4	21.0		68
10 (13.4)	2930	W-DF160ML	18.2	{ 88.5 88.5 87.0 0.93 0.92 0.89 }	{ 0.93 0.92 0.89 }	33	1.9	6.7	2.3	1.7	11.2		68
12.5 (16.8)	2940	W-DF160LS	22.2	{ 92.5 92.5 92.0 0.93 0.91 0.86 }	{ 0.93 0.91 0.86 }	40	2.2	8.4	2.5	2.0	6.8		68
15 (20)	2940	W-DF180MF	26	{ 91.5 91.0 90.0 0.92 0.91 0.86 }	{ 0.92 0.91 0.86 }	49	2.0	8.1	2.4	1.8	9.4		68
20 (27)	2935	W-DF200LGX	35	{ 91.1 90.9 89.5 0.92 0.87 0.81 }	{ 0.92 0.87 0.81 }	65	2.5	6.6	2.7	2.0	8.3	0.15	73
25 (34)	2950	W-DF200LNX	43	{ 92.4 92.6 91.1 0.91 0.89 0.88 }	{ 0.91 0.89 0.88 }	81	2.8	7.7	2.9	2.3	7.3	0.18	73
30 (40)	2950	W-DF225MN	51	{ 93.1 92.7 91.1 0.91 0.90 0.84 }	{ 0.91 0.90 0.84 }	97	2.4	7.6	2.7	1.9	7.3	0.47	75
37 (50)	W-DF250SN †			{ }	{ }								

† Increased outputs / frames / shaft allocations based on BS5000 part 10 Appendix A.

Where performance details are incomplete refer to Brook Crompton.

Performance data

3000 min⁻¹ (2 pole), T3

Rated power P _N kW (hp)	Full load speed in revolutions per minute n min ⁻¹	Type	I _N 400 V A	η 1.0 P _N 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E s	J kgm ²	L _{PA} dB(A)
50 (67)	2955	W-DF250MN †	83	{ 94.9 95.1 94.5 }	{ 0.92 0.90 0.86 }	162	1.3	6.0	1.8	1.2	9.2	0.7	77
60 (80)	2955	W-DF280SN †	100	{ 94.5 94.4 93.5 }	{ 0.92 0.90 0.77 }	194	1.8	6.6	2.4	1.6	8.4	0.8	77
75 (100)		W-DF280MN †		{ }	{ }							1.4	78
90 (125)		W-DF315SN †		{ }	{ }							1.7	78
100 (134)	2975	W-DF315MN	166	{ 95.0 94.8 93.6 }	{ 0.92 0.90 0.86 }	320	1.7	7.5	2.3	1.5	7.5	2.4	80
105 (140)	2975	W-DF315LR	172	{ 95.2 94.8 93.7 }	{ 0.93 0.92 0.89 }	338	2.1	7.2	2.8	1.7	9.1	3.07	80
110 (150)		W-DF315MP		{ }	{ }							2.6	80
132 (175)		W-DF315LN		{ }	{ }							2.8	80
150 (200)		W-DF355SN		{ }	{ }							5.9	80
185 (250)		W-DF355MN		{ }	{ }							7.0	80
225 (300)		W-DF355LN		{ }	{ }							8.0	80

† Increased outputs / frames / shaft allocations based on BS5000 part 10 Appendix A.

Where performance details are incomplete refer to Brook Crompton.

Performance data

1500 min⁻¹ (4 pole), T3

Rated power P _N kW (hp)	Full load speed in revolutions per minute	Frame reference and size	Full load current at rated voltage	Efficiency	Power factor	Full load torque	Direct on line starting torque ratio	Direct on line starting current ratio	Direct on line pull-out torque ratio	Direct on line pull-up torque	Direct on line t _E time	Rotor inertia W K ²	Mean sound pressure level @ 1 m on no load
n min ⁻¹	Type	I _N 400 V A	η 1.0 P _N 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E s	J kgm ²	L _{PA} dB(A)	
0.37 (0.5)	1390	W-DF80ME	1.0	{ 74.5 76.0 74.0 0.75 P _N 0.75 P _N 0.5 P _N }	0.77 0.69 0.55	2.5	1.8	4.3	2.0	1.6	42.0	0.0015	47
0.55 (0.75)	1410	W-DF80ME	1.59	{ 75.0 75.0 72.5 0.75 P _N 0.64 0.50 }	0.73 0.64 0.50	3.7	1.7	4.5	2.2	1.5	16.6	0.0015	47
0.75 (1)	1410	W-DF80MG	2.03	{ 78.0 78.0 75.0 0.75 P _N 0.74 0.49 0.30 }	0.74 0.69 0.50	5	2.1	4.9	2.4	1.9	10.5	0.0019	47
1 (1.3)	1410	W-DF90SE	2.49	{ 77.5 78.5 76.5 0.75 P _N 0.78 0.56 0.36 }	0.78 0.65 0.46	6.8	2.1	5.4	2.4	1.9	8.6	0.0028	48
1.35 (1.8)	1410	W-DF90LK	3.2	{ 80.0 81.0 79.5 0.75 P _N 0.81 0.72 0.42 }	0.81 0.72 0.42	9.1	2.8	5.8	2.8	2.5	9.3	0.0035	48
2 (2.7)	1415	W-DF100LJ	4.7	{ 82.0 83.5 83.5 0.75 P _N 0.82 0.65 0.42 }	0.82 0.65 0.42	14	2.1	5.2	2.3	1.9	11.8	0.008	54
2.5 (3.4)	1420	W-DF100LR	5.8	{ 84.5 85.0 84.0 0.75 P _N 0.85 0.62 0.42 }	0.85 0.62 0.42	17	2.0	6.4	2.3	1.8	11.0	0.009	54
3.6 (4.8)	1440	W-DF112MS	7.8	{ 86.0 86.5 85.5 0.75 P _N 0.81 0.62 0.41 }	0.81 0.62 0.41	24	2.6	7.1	2.9	2.3	5.5	0.015	56
5 (6.7)	1445	W-DF132SJ	10.4	{ 87.0 88.0 87.0 0.75 P _N 0.84 0.79 0.69 }	0.84 0.79 0.69	33	2.0	6.8	2.3	1.8	7.2	0.027	59
6.8 (9.1)	1440	W-DF132MVX	13.8	{ 88.0 88.5 88.0 0.75 P _N 0.85 0.81 0.71 }	0.85 0.81 0.71	45	2.8	7.1	3.1	2.5	6.1	0.033	59
10 (13)	1465	W-DF160MJ	19.5	{ 90.5 90.0 86.2 0.75 P _N 0.86 0.82 0.74 }	0.86 0.82 0.74	65	2.3	7.1	2.6	2.1	9.4	0.068	63
13.5 (18)	1465	W-DF160LU	25.4	{ 91.5 91.0 86.4 0.75 P _N 0.88 0.85 0.78 }	0.88 0.85 0.78	88	2.4	8.0	2.7	2.1	6.2	0.084	63
15 (20)	1470	W-DF180MF	28.3	{ 92.0 91.0 85.6 0.75 P _N 0.87 0.84 0.75 }	0.87 0.84 0.75	97	2.5	8.6	2.8	2.2	6.9	0.16	62
17.5 (23)	1470	W-DF180LM	32	{ 93.5 93.0 90.9 0.75 P _N 0.88 0.86 0.79 }	0.88 0.86 0.79	114	1.9	7.2	2.2	1.8	6.3	0.19	62
27 (36)	1470	W-DF200LNX	49	{ 92.3 93.0 92.6 0.75 P _N 0.86 0.83 0.74 }	0.86 0.83 0.74	174	2.7	8.2	3.2	2.0	6.9	0.31	65
30 (40)	1470	W-DF225SN	54	{ 92.7 93.1 92.7 0.75 P _N 0.87 0.81 0.71 }	0.87 0.81 0.71	194	2.0	7.3	2.8	1.7	6.2	0.45	66
36 (48)	1475	W-DF225MN	63	{ 93.5 93.6 92.7 0.75 P _N 0.88 0.86 0.79 }	0.88 0.86 0.79	233	2.5	8.4	2.9	1.8	5.4	0.65	67

Performance data

1500 min⁻¹ (4 pole), T3

Rated power P _N kW (hp)	Full load speed in revolutions per minute n min ⁻¹	Type	I _N 400 V A	η 1.0 P _N 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E s	J kgm ²	L _{PA} dB(A)
40 (54)	1475	W-DF250SN †	71	{ 93.5 93.5 92.5 }	{ 0.88 0.83 0.77 }	259	2.8	8.6	3.2	1.9	5.7	0.75	67
55 (75)	1480	W-DF250MN †	97	{ 94.2 94.2 93.3 }	{ 0.87 0.84 0.75 }	355	2.5	7.5	2.7	1.9	7.7	1.4	69
70 (94)	1480	W-DF280SN †	125	{ 94.5 94.5 93.6 }	{ 0.86 0.83 0.75 }	452	3.1	8.0	3.2	2.2	5.1	1.6	69
85 (114)	1480	W-DF280MN †	148	{ 94.5 94.6 94.0 }	{ 0.88 0.86 0.81 }	548	2.4	6.9	2.6	2.0	7.4	3.2	71
95 (127)		W-DF315SN †		{ }	{ }							3.7	71
110 (150)	1485	W-DF315MR	185	{ 95.6 95.5 95.3 }	{ 0.90 0.89 0.84 }	710	2.4	7.1	2.6	2.0	8.6	4.4	73
135 (181)	1490	W-DF315LN	230	{ 95.8 95.7 95.0 }	{ 0.89 0.88 0.85 }	865	3.0	8.9	3.3	2.5	6.8	5.5	73
150 (200)		W-DF355SG		{ }	{ }							8.2	76
160 (215)		W-DF355SJ		{ }	{ }							9.5	79
185 (250)		W-DF355SN		{ }	{ }							10.6	79
200 (270)		W-DF355MJ		{ }	{ }							11.9	79
225 (300)		W-DF355MN		{ }	{ }							13.5	79
260 (349)	1490	W-DF355LN	440	{ 96.0 96.0 95.5 }	{ 0.89 0.87 0.82 }	1666	2.4	6.8	2.8	1.9	5.3	14.6	79

† Increased outputs / frames / shaft allocations based on BS5000 part 10 Appendix A.

Where performance details are incomplete refer to Brook Crompton.

Performance data

1000 min⁻¹ (6 pole), T3

Rated power P _N kW (hp)	n min ⁻¹	Type	I _N 400 V A	η 1.0 P _N 0.75 P _N 0.5 P _N	η 1.0 P _N 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E S	J kgm ²	L _{PA} dB(A)
0.37 (0.5)	915	A-DF80MG	1.34	{ 69.0 69.0 65.0 }	{ 0.62 0.54 0.41 }		3.9	2.2	3.6	2.3	1.8	39.0	0.0015	49
0.55 (0.75)		W-DF80MM		{ }									0.0021	49
0.65 (0.87)		W-DF90SG		{ }									0.0028	65
0.95 (1.3)	930	W-DF90LT	2.94	{ 76.5 76.0 73.0 }	{ 0.64 0.55 0.43 }		9.75	2.6	4.6	2.8	2.3	14.0	0.0039	65
1.3 (1.7)		W-DF100LR		{ }									0.009	58
1.9 (2.5)		W-DF112MS		{ }									0.014	54
2.6 (3.5)		W-DF132SG		{ }									0.023	58
3.5 (4.7)		W-DF132ML		{ }									0.027	58
4.8 (6.4)	960	W-DF132MR	11.0	{ 87.0 88.0 87.0 }	{ 0.75 0.68 0.56 }		4.8	2.3	6.6	2.7	1.9	6.4	0.031	58
6.6 (8.8)	980	W-DF160MM	14.9	{ 89.0 88.5 86.5 }	{ 0.74 0.68 0.58 }		64	2.3	7.2	2.6	2.0	22.0	0.10	59
9.7 (13)		W-DF160LV		{ }									0.12	59
13.2 (18)		W-DF180LM		{ }									0.23	59
18.5 (25)		W-DF200LGX		{ }									0.42	62
22 (30)	980	W-DF200LNX	43	{ 91.3 91.8 91.4 }	{ 0.81 0.76 0.66 }		215	2.0	8.0	2.4	1.7	8.0	0.48	62
30 (40)		W-DF225MN		{ }									1.23	63
37 (50)		W-DF250SN †		{ }									1.47	65

† Increased outputs / frames / shaft allocations based on BS5000 part 10 Appendix A.

Where performance details are incomplete refer to Brook Crompton.

Performance data

1000 min⁻¹ (6 pole), T3 temperature

Rated power P _N kW (hp)	n min ⁻¹	Type	I _N 400 V A	η 1.0 P _N 0.75 P _N 0.5 P _N	η 1.0 P _N 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E s	J kgm ²	L _{PA} dB(A)
55 (75)		W-DF280SN †											2.9	65
72 (96)	985	W-DF280MN †	133	93.6 93.6 92.7	0.84 0.81 0.73		698	3.0	7.4	2.6	2.1	7.9	5.0	68
85 (114)		W-DF315SN †											6.0	68
88 (118)		W-DF315LN											7.3	70
95 (127)	985	W-DF315MN	158	95.0 95.3 94.9	0.85 0.84 0.79		850	3.2	7.9	2.3	2.1	9.1	7.3	70
110 (150)		W-DF315LN											7.3	70
132 (175)		W-DF355SG											10	74
150 (200)		W-DF355SJ											11.1	74
160 (215)		W-DF355SN											12.2	74
185 (250)		W-DF355MJ											13.6	77
200 (270)		W-DF355MN											15.2	77
225 (300)		W-DF355LJ											16.9	77
250 (335)		W-DF355LN											18.6	77

† Increased outputs / frames / shaft allocations based on BS5000 part 10 Appendix A.

Where performance details are incomplete refer to Brook Crompton.

Performance data

750 min⁻¹ (8 pole)

Rated power P _N kW (hp)	Full load speed in revolutions per minute n min ⁻¹	Frame reference and size	Full load current at rated voltage I _N 400 V A	Efficiency η 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E S	J kgm ²	L _{PA} dB(A)
0.37 (0.5)		A-DF90SG		{}	{}							0.0028	50
0.5 (0.67)	700	A-DF90LM	2.13	{}	{}	6.8		3.1			24.5	0.0035	50
0.65 (0.87)		W-DF100LR		{}	{}							0.009	53
0.95 (1.3)		W-DF100LS		{}	{}							0.0095	53
1.3 (1.7)	705	W-DF112MS	4.4	{76.0 74.5 71.0}	{0.61 0.51 0.39}	17.6	1.7	3.9	1.9	1.6	28.0	0.015	57
1.9 (2.5)	720	W-DF132SM	5.5	{81.0 80.5 77.5}	{0.63 0.55 0.43}	25	1.9	4.9	2.1	1.7	38.0	0.029	57
2.6 (3.5)		W-DF132MR		{}	{}							0.031	57
3.5 (5)		W-DF160ME		{}	{}							0.09	53
4.8 (6.4)		W-DF160MM		{}	{}							0.11	53
6.6 (8.8)		W-DF160LV		{}	{}							0.14	53
9.7 (13)		W-DF180LM		{}	{}							0.24	58
15 (20)		W-DF200LNX		{}	{}							0.48	60
18.5 (25)		W-DF225SN		{}	{}							0.75	60
22 (30)		W-DF225MN		{}	{}							1.23	62
22 (30)	735	W-DF250SN †	4.8	{91.8 92.3 91.9}	{0.73 0.69 0.59}	285	2.0	5.8	2.8	1.6	35.3	2.9	63
37 (50)		W-DF250MN †		{}	{}							2.55	63
45 (60)		W-DF280SN †		{}	{}							2.9	63

† Increased outputs / frames / shaft allocations based on BS5000 part 10 Appendix A.

Where performance details are incomplete refer to Brook Crompton.

Performance data

750 min⁻¹ (8 pole)

Rated power P _N kW (hp)	n min ⁻¹	Type	I _N 400 V A	η 1.0 P _N 0.75 P _N 0.5 P _N	Cos Ø 1.0 P _N 0.75 P _N 0.5 P _N	M _N Nm	M _A M _N	I _A I _N	M _K M _N	M _S M _N	t _E s	J kgm ²	L _{PA} dB(A)
55 (75)		W-DF280MN †	{ } { }									5.0	64
75 (100)		W-DF315SN †	{ } { }									6.0	64
85 (114)		W-DF315MN	{ } { }									6.1	65
100 (134)		W-DF315LN	{ } { }									7.3	65
110 (150)		W-DF355SJ	{ } { }									12.2	72
132 (175)		W-DF355SN	{ } { }									13.6	72
150 (200)		W-DF355MJ	{ } { }									15.2	74
160 (215)		W-DF355MN	{ } { }									16.9	74
185 (250)		W-DF355LN	{ } { }									18.6	74



† Increased outputs / frames / shaft allocations based on BS5000 part 10 Appendix A.

Where performance details are incomplete refer to Brook Crompton.



Dimensions

Foot, flange and face mounting - frames 80 - 180L



IM B3
IM 1001
Mounting options

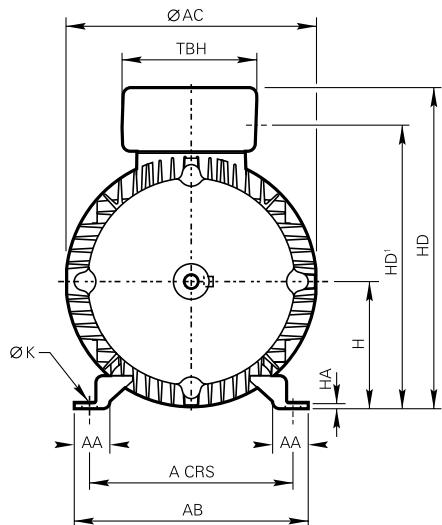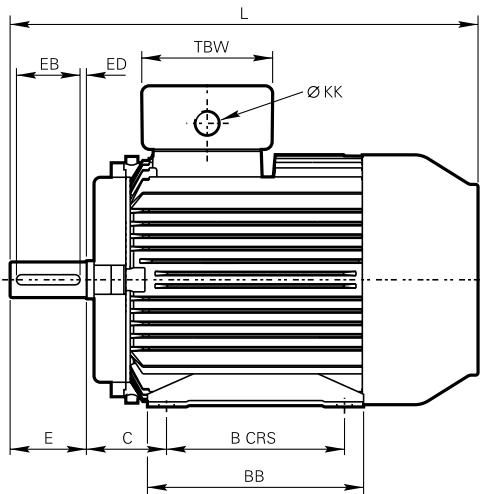

IM B5/IM B35
IM 3001/IM 2001
Mounting options

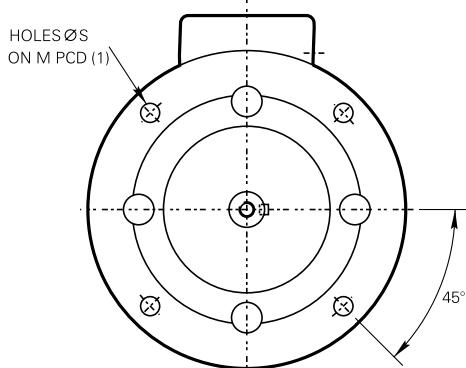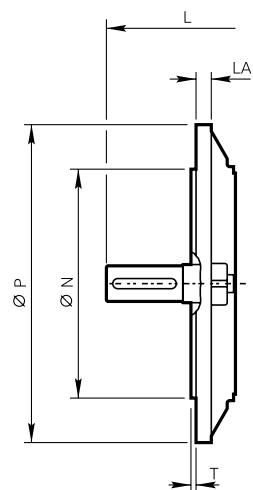

IM B14/IM B34
IM 3601/IM 2101
Mounting options

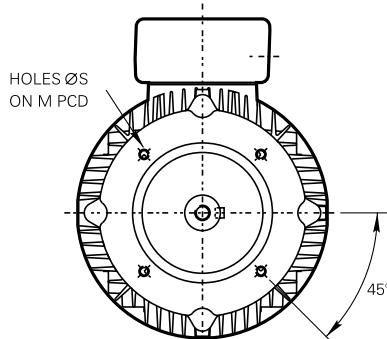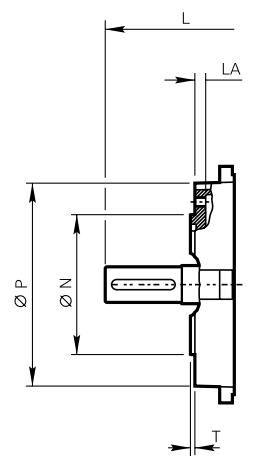


Foot, flange and face mounting - frames 80 - 180L

Type	General											Terminal box				
	A	B	C	H	K	L ⁽¹⁾	AA	AB	AC	BB	HA	HD	HD1	TBW	TBH	KK
W-DF80M	125	100	50	80	10	278	35	157	158	127	10	-	-	120	120	1 X M20
W-DF90S	140	100	56	90	10	322	38	175	175	155	12	-	-	120	120	1 X M20
W-DF90L	140	125	56	90	10	322	38	175	175	155	12	-	-	120	120	1 X M20
W-DF100L	160	140	63	100	12	368	34	195	197	165	14	274	234	120	120	2 X M20
W-DF112M	190	140	70	112	12	382	40	230	220	182	16	305	257	135	135	2 X M25
W-DF132S	216	140	89	132	12	447	47	255	260	220	17	348	300	135	135	2 X M25
W-DF132M	216	178	89	132	12	447	47	255	260	220	17	348	300	135	135	2 X M25
W-DF132MX	216	178	89	132	12	484.5	47	255	260	220	17	348	300	135	135	2 X M25
W-DF160M	254	210	108	160	15	604	55	300	315	300	22	428	368	174	174	2 X M32
W-DF160L	254	254	108	160	15	604	55	300	315	300	22	428	368	174	174	2 X M32
W-DF180M	279	241	121	180	15	663	64	344	355	326	22	469	410	174	174	2 X M32
W-DF180L	279	279	121	180	15	663	64	344	355	326	22	469	410	174	174	2 X M32

Type	IM B5 mounting						IM 1B14 mounting					
	M	N	P	S	T	LA	M	N	P	S	T	LA
W-DF80M	165	130	200	12	3.5	12	-	80	120	M6	3	9
W-DF90S/L	165	130	200	12	3.5	12	-	95	120	M8	3	9
W-DF100L	215	180	250	14.5	4	12	130	110	160	M8	3.5	12.5
W-DF112M	215	180	250	14.5	4	12	130	110	164	M8	3.5	13
W-DF132S	265	230	300	14.5	4	12	165	130	200	M10	3.5	13
W-DF132M/MX	265	230	300	14.5	4	12	165	130	200	M10	3.5	13
W-DF160M	300	250	350	18.5	5	13	215	180	250	M12	4	13
W-DF160L	300	250	350	18.5	5	13	215	180	250	M12	4	13
W-DF180M	300	250	350	18.5	5	15	-	-	-	-	-	-
W-DF180L	300	250	350	18.5	5	15	-	-	-	-	-	-

Type	Shaft									
	D	E	F	G	GD	EB	ED	DH		
W-DF80M	19	40	6	15.5	6	32	4	M6 x 16		
W-DF90S/L	24	50	8	20	7	40	5	M8 x 19		
W-DF100L	28	60	8	23.9	7	50	5	M10 x 22		
W-DF112M	28	60	8	23.9	7	50	5	M10 x 22		
W-DF132S	38	80	10	33	8	70	5	M12 x 28		
W-DF132M/MX	38	80	10	33	8	70	5	M12 x 28		
W-DF160M	42	110	12	37	8	100	5	M16 x 36		
W-DF160L	42	110	12	37	8	100	5	M16 x 36		
W-DF180M	48	110	14	42.5	9	100	5	M16 x 36		
W-DF180L	48	110	14	42.5	9	100	5	M16 x 36		

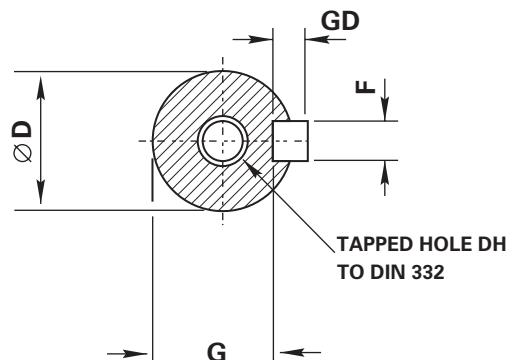



⁽¹⁾ For vertically mounted, shaft down motors see table on page 23 for increase in overall length due to the fitting of an impact cover.

Dimensions

Foot and flange mounting - frames 200 - 355L



IM B3
IM 1001

Mounting options

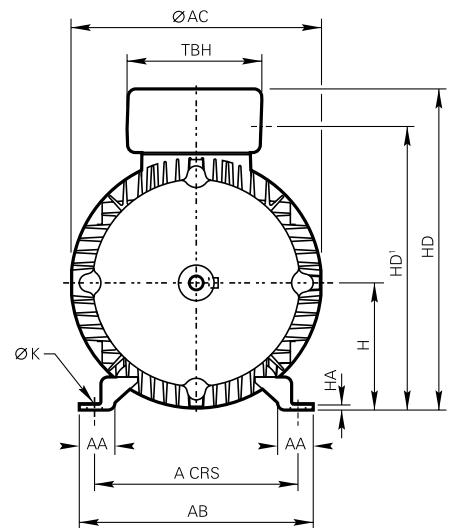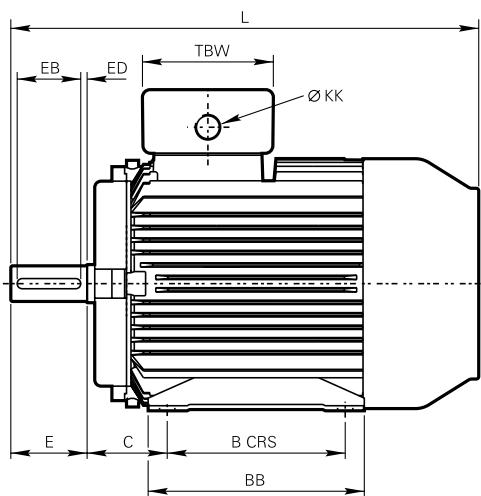

IM B5/IM B35
IM 3001/IM 2001

Mounting options

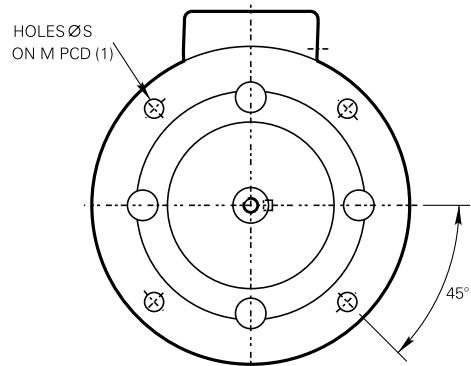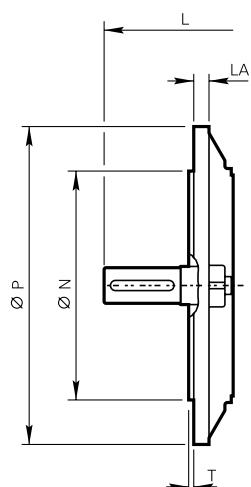


(1) 8 holes at 0° for flanges to suit 225 frames and above to British specification

Foot and flange mounting - frames 200 - 355L

Type	General										4 pole +		2 pole		Terminal box					
	A	B	C	H	K ⁽¹⁾	L ⁽²⁾	L ⁽²⁾	AA	AB	AC	BB	HA	HD	TBW	TBH					
W-DF200LX	318	305	133	200	M16	787	787	74	382	381	359	30	501	176	220					
W-DF225S	356	286	149	225	M16	875	845	70	426	410	349	25	550 ⁽³⁾	220	288					
W-DF225M	356	311	149	225	M16	915	885	70	426	448	374	25	570	220	288					
W-DF250S ⁽⁵⁾	406	311	168	250	M20	985	985	79	482	448	381	28	595 ⁽⁴⁾	220	288					
W-DF250M ⁽⁵⁾	406	349	168	250	M20	1030	1030	79	482	508	419	28	625 ⁽³⁾	220	288					
W-DF280S ⁽⁵⁾	457	368	190	280	M20	1100	1070	83	540	508	438	35	655 ⁽³⁾	220	288					
W-DF280M ⁽⁵⁾	457	419	190	280	M20	1145	1115	83	540	563	487	35	810	330	526					
W-DF315S ⁽⁵⁾	508	406	216	315	M24	1215	1185	89	597	563	483	38	845	330	526					
W-DF315M	508	457	216	315	M24	1245	1215	89	597	640	533	38	875	330	526					
W-DF315L	508	508	216	315	M24	1315	1285	89	597	640	583	38	875	330	526					
W-DF355S	610	500	254	355	M24	1485	1415	100	710	732	626	27	970	330	526					
W-DF355M	610	560	254	355	M24	1605	1535	100	710	732	686	27	970	330	526					
W-DF355L	610	630	254	355	M24	1655	1585	100	710	732	756	27	970	330	526					

Type	IM B5, IM B35 mounting					
	M	N	P	S	T	LA
W-DF200LX	350	300	400	19	5	19
W-DF225S	400	350	450	19	5	19
W-DF225M	400	350	450	19	5	19
W-DF250S	500	450	550	19	5	25
W-DF250M	500	450	550	19	5	25
W-DF280S	500	450	550	19	5	25
W-DF280M	500	450	550	19	5	25
W-DF315S	600	550	660	24	6	29
W-DF315M	600	550	660	24	6	29
W-DF315L	600	550	660	24	6	29
W-DF355S	740	680	800	24	6	28
W-DF355M	740	680	800	24	6	28
W-DF355L	740	680	800	24	6	28

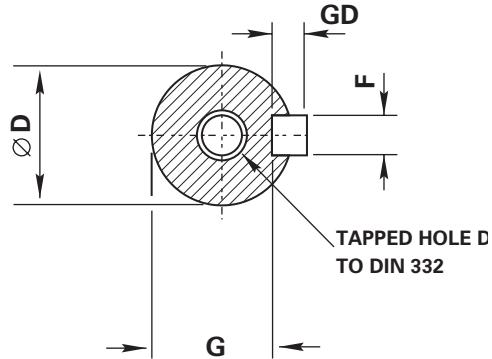

Type	Shaft ⁽⁵⁾						4 pole +						2 pole					
	D	E	F	G	GD	EB	ED	D	E	F	G	GD	EB	ED	DH			
W-DF200LX	55	110	16	49	10	100	5	55	110	16	49	10	100	5	M20 x 42			
W-DF225S	60	140	18	53	11	125	10	55	110	16	49	10	100	5	M20 x 42			
W-DF225M	60	140	18	53	11	125	10	55	110	16	49	10	100	5	M20 x 42			
W-DF250S	70	140	20	62.5	12	125	10	60	140	18	53	11	125	10	M20 x 42			
W-DF250M	70	140	20	62.5	12	125	10	60	140	18	53	11	125	10	M20 x 42			
W-DF280S	80	170	22	71	14	160	5	65	140	18	58	11	125	10	M20 x 42			
W-DF280M	80	170	22	71	14	160	5	65	140	18	58	11	125	10	M20 x 42			
W-DF315S	85	170	22	76	14	160	5	65	140	18	58	11	125	10	M20 x 42			
W-DF315M	85	170	22	76	14	160	5	65	140	18	58	11	125	10	M20 x 42			
W-DF315L	85	170	22	76	14	160	5	65	140	18	58	11	125	10	M20 x 42			
W-DF355S	100	210	28	90	16	200	5	75	140	20	67.5	12	125	10	M24 x 50			
W-DF355M	100	210	28	90	16	200	5	75	140	20	67.5	12	125	10	M24 x 50			
W-DF355L	100	210	28	90	16	200	5	75	140	20	67.5	12	125	10	M24 x 50			

⁽¹⁾ Bolt size accepted by mounting hole.

⁽²⁾ For vertically mounted, shaft down motors see table on page 23 for increase in overall length due to the fitting of an impact cover.


⁽³⁾ add 25mm when cable entry is facing drive end

⁽⁴⁾ add 50mm when cable entry is facing drive end


⁽⁵⁾ output / frame / shaft number allocation based on BS5000 part 10 Appendix A

Mounting options

Horizontal shaft:

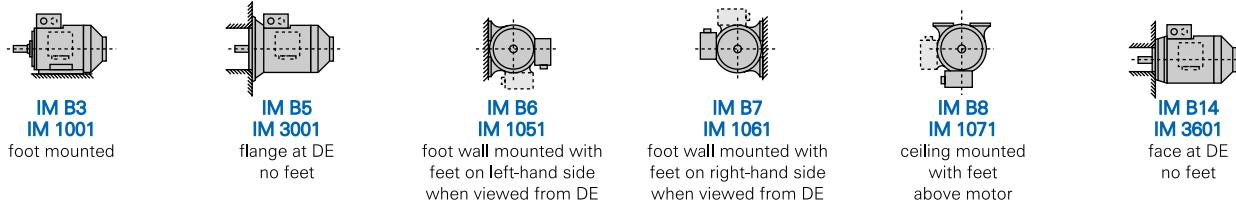

Vertical shaft:

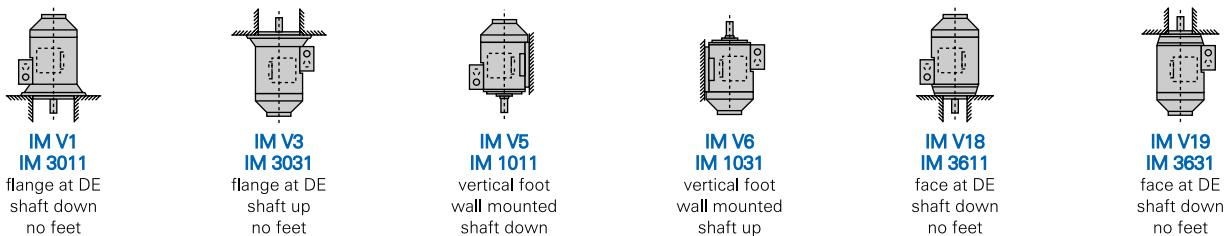

Approximate shipping specifications

Type	Net weight (kg)	Gross weight (kg)	Cubage (m ³)
W-DF80M	15	16.5	0.02
W-DF90S	19	20.5	0.03
W-DF90L	22	23.5	0.03
W-DF100L	35.5	38	0.03
W-DF112M	45	48	0.05
W-DF132S	68	71	0.08
W-DF132M	72.5	78.5	0.08
WDF132MX	82.6	88.6	0.08
W-DF160M	121	133	0.15
W-DF160L	133	145	0.15
W-DF180M	162	178	0.21
W-DF180L	178	194	0.21
W-DF200LX	255	270	0.30
W-DF225S	320	335	0.37
W-DF225M	375	390	0.37
W-DF250S	420	460	0.63
W-DF250M	570	610	0.70
W-DF280S	660	721	1.2
W-DF280M	800	871	1.2
W-DF315S	1000	1095	1.8
W-DF315M	1100	1195	1.8
W-DF315L	1300	1395	1.8
W-DF355S	2000	2120	2.3
W-DF355M	2300	2420	2.3
W-DF355L	2500	2620	2.3

Technical information:

Mechanical

Bearings and greasing arrangements

Bearings are pre-packed with a grease type dependant on frame size and re-greasing facility as detailed in table opposite:

Standard and re-greasing facilities		
Type	Standard grease	Re-greasing facility
80 - 180	EA6 Polyurea	Available
200 - 355	Esso Unirex N3	Standard

Bearing references and oil seals for horizontally-mounted motors only

Type	Polarity	Bearings ⁽¹⁾		Oil seals ⁽²⁾	
		Drive end	Non-drive end	Drive end	Non-drive end
W-DF80M	All	62042Z	62022Z	20 x 30 x 7 ⁽³⁾	15 x 24 x 5 ⁽³⁾
W-DF90S/L	All	62052Z	62032Z	25 x 35 x 7 ⁽³⁾	17 x 28 x 6 ⁽³⁾
W-DF100L	All	62062Z	62052Z	30 x 42 x 7 ⁽³⁾	25 x 37 x 7 ⁽³⁾
W-DF112M	All	62062Z	62052Z	30 x 42 x 7 ⁽³⁾	25 x 37 x 7 ⁽³⁾
W-DF132S/M/MX	All	62082Z	63052Z	40 x 52 x 7 ⁽³⁾	25 x 37 x 7 ⁽³⁾
W-DF160M/L	All	63092Z	63072Z	45 x 60 x 8 ⁽³⁾	35 x 47 x 7 ⁽³⁾
W-DF180M/L	All	63102Z	63082Z	50 x 65 x 8 ⁽³⁾	40 x 52 x 7 ⁽³⁾
W-DF200LX	All	6312	6312	60 x 80 x 8 ⁽³⁾	60 x 80 x 8 ⁽³⁾
W-DF225S	All	6313	6313	65 x 90 x 10 ⁽⁴⁾	65 x 90 x 10 ⁽⁴⁾
W-DF225M	All	6314	6314	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
W-DF250S	2	6314	6314	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
	4 up	6316	6316	80 x 110 x 10 ⁽³⁾	80 x 110 x 10 ⁽³⁾
W-DF250M	2	6314	6314	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
	4 up	6318	6318	90 x 120 x 12 ⁽³⁾	90 x 120 x 12 ⁽³⁾
W-DF280S	2	6314	6314	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
	4 up	6318	6318	90 x 120 x 12 ⁽³⁾	90 x 120 x 12 ⁽³⁾
W-DF280M	2	6316	6316	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
	4 up	6319	6319	90 x 120 x 12 ⁽³⁾	90 x 120 x 12 ⁽³⁾
W-DF315S	2	6316	6316	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
	4 up	6319	6319	90 x 120 x 12 ⁽³⁾	90 x 120 x 12 ⁽³⁾
W-DF315M	2	6316	6316	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
	4 up	6319	6319	90 x 120 x 12 ⁽³⁾	90 x 120 x 12 ⁽³⁾
W-DF315L	2	6316	6316	70 x 90 x 10 ⁽⁴⁾	70 x 90 x 10 ⁽⁴⁾
	4 up	6319	6319	90 x 120 x 12 ⁽³⁾	90 x 120 x 12 ⁽³⁾
W-DF355S/M/L	2	N316	6316	75 x 100 x 10 ⁽⁴⁾	75 x 100 x 10 ⁽⁴⁾
	4 up	N324	6324	115 x 145 x 14 ⁽³⁾	115 x 145 x 14 ⁽³⁾

(1) Frame sizes 80 and 90 have bearings with CN clearances, frame sizes 100 to 355 have bearings with C3 clearance 'medium' series

(2) Sizes given are in mm, and represent bore x outside diameter x width

Material: ⁽³⁾ Nitrile rubber ⁽⁴⁾ Silicon rubber

Grease life expected at 80°C bearing temperature x 10³ hours

Type	3000 min ⁻¹		1500 min ⁻¹		1000 min ⁻¹		750 min ⁻¹	
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical
W-DF80-90	22.0	22.0	32.0	32.0	35.0	35.0	35.0	35.0
W-DF100-180L	26.0	26.0	35.0	35.0	35.0	35.0	35.0	35.0
W-DF200LX	12.6	8.2	30.0	20.3	30.0	27.8	30.0	30.0
W-DF225S	12.6	8.2	30.0	20.3	30.0	27.8	30.0	30.0
W-DF225M	11.3	7.4	29.5	19.2	30.0	26.0	30.0	30.0
W-DF250S	11.3	7.4	26.3	17.1	30.0	23.6	30.0	29.3
W-DF250M	11.3	7.4	23.4	15.2	30.0	21.3	30.0	27.8
W-DF280S	11.3	7.4	23.4	15.2	30.0	21.3	30.0	27.8
W-DF280M	9.4	6.1	21.3	13.8	30.0	20.3	30.0	26.0
W-DF315S	9.4	6.1	21.3	13.8	30.0	20.3	30.0	26.0
W-DF315M	9.4	6.1	21.3	13.8	30.0	20.3	30.0	26.0
W-DF315L	9.4	6.1	21.3	13.8	30.0	20.3	30.0	26.0
W-DF355S/M/L⁽¹⁾	5.0	3.3	8.2	5.3	16.2	10.5	24.5	15.9
W-DF355S/M/L⁽²⁾	9.4	6.1	13.5	8.8	22.5	14.6	30.0	19.5

(1) DE = Drive End

(2) NDE = Non-Drive End

Technical information:

Mechanical

Axial and radial loads

Maximum permissible external axial thrust and radial loads in Newtons (N)								
Type	Poles	Horizontal shaft		Vertical shaft				Maximum permissible radial load at end of shaft (standard mounting)
		Load towards motor	Load away from motor	Shaft up	Shaft down	Load towards motor	Load away from motor	
W-DF80M	2	339	539	321	562	362	521	774
	4	303	503	283	530	330	483	729
	6	284	484	260	516	316	460	653
	8	296	496	272	528	328	472	662
W-DF90S/L	2	444	684	421	716	476	661	915
	4	398	638	366	682	442	606	854
	6	349	589	309	641	401	549	720
	8	369	609	334	656	416	574	747
W-DF100L	2	781	1101	743	1159	839	1063	1295
	4	710	1030	655	1107	787	975	1215
	6	560	880	506	963	643	826	1145
	8	580	900	521	985	665	841	1018
W-DF112M	2	768	1088	715	1170	850	1035	1295
	4	690	1010	612	1131	811	932	1202
	6	541	861	463	979	659	783	1141
	8	565	885	487	1003	683	807	1009
W-DF132S	2	1355	1707	1266	1838	1486	1618	2114
	4	1269	1621	1168	1779	1427	1520	2095
	6	1186	1538	1074	1711	1359	1426	1997
	8	1002	1354	869	1556	1204	1221	1609
W-DF132M	4	1253	1605	1130	1794	1442	1482	2068
	6	1167	1519	1035	1718	1366	1387	1968
	8	997	1349	858	1561	1209	1210	1600
	2	2168	2663	2932	2002	2437	2497	3650
W-DF160M	4	2153	2648	2659	1960	2464	2160	3785
	6	2022	2517	2905	1777	2410	1977	3626
	8	1509	2004	2389	1250	1894	1450	3316
	2	2144	2639	2950	1951	2455	2151	3613
W-DF160L	4	2123	2618	2982	1895	2487	2095	3738
	6	1973	2468	2946	1669	2451	1869	3544
	8	1464	1959	2435	1144	1940	1344	3233
	2	2711	3274	3667	2465	3104	2665	4374
W-DF180M	4	2749	3312	3830	2426	3267	2626	4556
	6	2575	3138	3785	2166	3222	2366	4334
W-DF180L	8	2266	2829	3469	1850	2906	2050	3979

All figures are based on L10aah life of 20,000 hours

Technical information:

Mechanical

Maximum permissible external axial thrust and radial loads in Newtons (N)


Type	Poles	Horizontal shaft		Vertical shaft				Maximum permissible radial load at end of shaft	
		Load towards motor	Load away from motor	Shaft up		Shaft down		Standard ball bearing	Roller bearing
				Load towards motor	Load away from motor	Load towards motor	Load away from motor		
W-DF200LX	2	5435	4775	5005	5361	6021	4345	5125	7541
	4	6058	5398	5531	6121	6781	4871	5588	7541
	6	6055	5395	5457	6215	6875	4797	5536	7541
	8	5781	5121	5183	5941	6601	4523	5252	7541
W-DF225S	4	6692	6122	5941	7177	7747	5371	5963	8202
	6	6770	6200	5935	7371	7941	5365	5982	8202
	8	6441	5871	5606	7042	7612	5036	5648	8202
	2	6729	6197	6084	7082	7614	6213	6602	8745
W-DF225M	4	7530	6998	6745	8099	8631	6213	6876	8921
	6	7640	7108	6673	8463	8995	6141	6856	8921
	8	7293	6761	6326	8116	8648	5794	6501	8921
	2	6640	6108	5837	7209	7741	5305	6262	8921
W-DF250S	4	9012	8418	8030	9794	10388	7436	8163	14166
	6	9391	8797	8311	10311	10905	7717	8477	14166
	8	9007	8413	7927	9927	10521	7333	8087	14166
	2	6505	5911	5472	7352	7946	4878	5897	8921
W-DF250M	4	10241	9579	8943	11377	12039	8281	9627	14166
	6	10846	10184	9423	12157	12819	8761	10182	14166
	8	10400	9738	8977	11711	12373	8315	9706	14166
	2	6268	5736	5101	7355	7887	4569	5795	9503
W-DF280S	4	9774	9112	8014	11534	12196	7352	8842	17348
	6	10582	9920	8704	12524	13186	8042	9386	17348
	8	10136	9474	8257	12077	12739	7595	8919	17348
	2	7443	6849	5921	8957	9551	5327	6804	11342
W-DF280M	4	10305	9965	8299	12719	13059	7959	9443	17414
	6	11190	10850	9050	13810	14150	8710	10042	17414
	8	10797	10457	8657	13417	13757	8317	9630	17414
	2	7337	6743	5654	9082	9676	5060	6680	11342
W-DF315S	4	10077	9737	7672	13044	13384	7332	9121	20887
	6	10958	10618	8419	14131	14471	8079	9734	20887
	8	10347	10007	7798	13510	13850	7458	9312	20887
	2	7398	6804	5664	9154	9748	5070	6885	11342
W-DF315M	4	10192	9852	8006	12862	13202	7666	9482	20748
	6	11060	10720	8715	13971	14311	8375	10066	20748
	8	10667	10327	8322	13578	13918	7982	9640	20748
	2	7055	6461	5050	9164	9758	4456	6606	11342
W-DF315L	4	10008	9668	7501	13123	13463	7161	9207	20748
	6	10872	10532	8207	14229	14569	7867	9801	20748
	8	10263	9923	7587	13609	13949	7247	9367	20748
	2	6118	5524	3136	9692	10286	2542	-	12627
W-DF355S	4	12994	11454	8799	17389	18929	7259	-	27533
	6	14038	12498	9387	19143	20683	7847	-	27533
	8	14106	12566	9455	19211	20751	7915	-	27533
	2	5779	5185	2326	10050	10644	1732	-	12627
W-DF355M	4	12528	10988	7511	18055	19595	5971	-	27533
	6	13148	11608	7523	19533	21073	5983	-	27533
	8	13214	11674	7589	19599	21139	6049	-	27533
	2	5595	5001	1734	10396	10990	1140	-	12627
W-DF355L	4	12343	10803	7038	18282	19822	5498	-	27533
	6	12936	11396	6980	19794	21334	5440	-	27533
	8	13002	11462	7046	19860	21400	5506	-	27533

All figures are based on L10aah life of 20,000 hours


Performance data - page notes

DOL starting
(BS EN 60034-12 Design N)

Typical speed/current curve

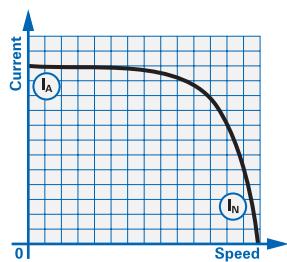


Typical speed/torque curve

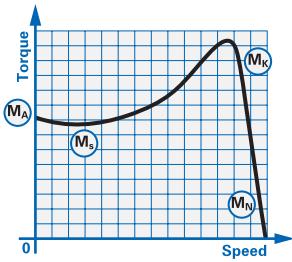


Star delta starting
(BS EN 60034-12 Design NY)

Typical speed/current curve

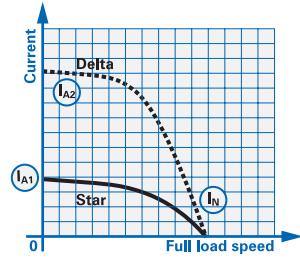

Typical speed/torque curve

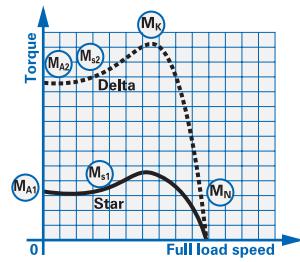

(I_A)	Starting current
(I_N)	Full load current
(M_A)	Starting torque or locked rotor torque
(M_S)	Pull up torque or run up torque
(M_K)	Pull out torque or breakdown torque
(M_N)	Full load torque

Torque/speed curves for specific motors can be supplied on request.

Start delta starting data available on request.


Performance figures are subject to IEC tolerances. Performance figures are based on a 400 volt winding. To calculate I_N on special voltages, multiply the I_N at 400 volts by the following factors:

Voltage	220	346	365	420	440	500	550
----------------	-----	-----	-----	-----	-----	-----	-----

Factor	1.82	1.16	1.1	0.95	0.91	0.80	0.73
---------------	------	------	-----	------	------	------	------

Dimensions – page notes

Shaft		
Dim D	British and European	
	Tol	Limits
11 to 18	j6	+0.008 -0.003
19 to 28	j6	+0.009 -0.004
32 to 48	k6	+0.018 +0.002
55 to 80	m6	+0.030 +0.011
82 to 120	m6	+0.035 +0.013

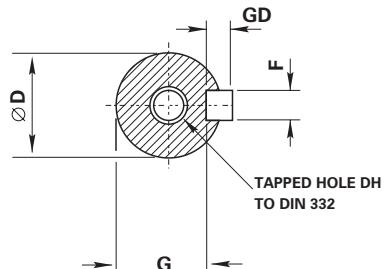

All dimensions in millimetres

Drain holes are standard on frames 160-355 and on request for frames 80-132

Flange		
Dim N	IEC 72-1 Annex C.I.7 Option 1	
	Tol	Limits
130 to 180	j6	+0.014 -0.011
230 to 250	h6	+0.016 -0.013
300	h6	+0.000 -0.032
350	h6	+0.000 -0.036
450	h6	+0.000 -0.040
550	h6	+0.000 -0.044
680	h6	+0.000 -0.050

Please note that 80 frame motors are only available as terminal box right or left.

Cable entry can be arranged in any one of four positions at 90° intervals

No eyebolts on frame sizes 80 (all poles) and 90 (6 and 8 pole)

Dimensions should not be used for installation purposes unless specially endorsed

B5 mounted motors have suffix 'D' in the frame reference, eg W-DF132MVX-D and B35 mounted motors have suffix 'H' in the frame reference, eg W-DF132MVX-H

B14 mounted motors have suffix 'C' in the frame reference, eg W-DF132MVX-C and B3/B14 mounted motors have suffix 'H' in the frame reference, eg W-DF132MVX-H

Face		
Dim N	IEC 72-1 Annex C.I.7 Option 1	
	Tol	Limits
60 and 80	j6	+0.012 -0.007
95 and 110	j6	+0.013 -0.009
130 and 180	j6	+0.014 -0.011

Impact covers

Vertically mounted motors fitted with impact cover	Increase in L Dim
Frame size	
W-DF80M-90L	29
W-DF100L-112M	30
W-DF132S-180L	40
W-DF200LX	45
W-DF225S/M	45
W-DF250S	45
W-DF250M	48
W-DF280S	48
W-DF280M	48
W-DF315S	48
W-DF315M/L	53
W-DF355S/M/L	65

Rotating Electrical Machines

Worldwide sales and service network

Argentina		Iran		Saudi Arabia
Galvez Motores Czerwony S.A.	T +54 3404 480715 F +54 3404 480715	Tehran Elvir Co	T +98 21 8028461 F +98 21 8006960	Jeddah Electrical Works & Maint
Australia		Ireland		Riyadh Samman Est Trade & Maint
Sydney Western Electric	T +61 2 9721 8888 F +61 2 9721 8800	Dublin GES Automation (Ireland) Ltd	T +353 1 4503277 F +353 1 4603327	T +96 61 447 7777 F +96 61 447 5555
Perth				
Downunder Submersible	T +61 8 9353 4255			
Motors Pty Ltd	F +61 3 9799 6822			
Melbourne	T +61 3 9314 4177			
CJ Pearce Pty Ltd	F +61 3 9314 5947			
Brisbane	T +61 7 3397 4575			
Edington Agencies	F +61 7 3397 4143			
Bahrain		Israel		
Manama	T +973 250878	Tel Aviv Izhac Shinitzky Ltd	T +972 3 562 4747 F +972 3 562 3385	
M/S Abdulla	F +973 261212			
Salman Kaikow				
Belgium		Italy		
Genk	T +32 89 357016	Milano Nuova CEAM	T +39 02 97288320 F +39 02 9788433	
Eltec System	F +32 89 361508	Parma Nuova CEAM	T +39 0521 984645 F +39 0521 982203	
Canada		Padova Nuova CEAM	T +39 049 98702244 F +39 049 503401	
Montreal	T +1 514 636 1116 F +1 514 636 4253	Torino Nuova CEAM	T +39 0116 474219 F +39 0116 472359	
Toll Free	T +1 888 668 9843			
Toronto	T +1 416 675 3844 F +1 416 675 6885			
Toll Free	T +1 800 463 8917			
Cyprus		Japan		
Kyriakides & Pierides Trading	T +357 2 352229 F +357 2 351945	Tokyo PTI Japan	T +81 3 3213 2570 F +81 3 3214 5238	
Denmark		Osaka Nippon Automatic Control Co	T +81 3 5434 1600 F +81 3 5434 1630	
Copenhagen	T +45 7027 1290			
Busk & Co AS	F +45 7027 1291			
Egypt		Malaysia		
Cairo	T +20 2 5844155	Kuala Lumpur Jasa Kita Eng Sdn Bhd	T +60 3 4043 9266 F +60 3 4041 5270	
El Mohandes Electrical Works & Mechanics	F +20 2 5851601			
	T +20 2 4054 9901/2/3/4			
Finland		Mexico		
Helsinki	T +358 9 877 0120	Chihuahua Megaohm	T +52 14 17 68 68 F +52 14 19 37 08	
Moves oy	F +358 9 877 01222			
Germany		Netherlands		
Mönchengladbach	T +49 2166 925 462 F +49 2166 925 143	Oosterhout	T +31 162 422212 F +31 162 421870	
Hong Kong		New Zealand		
Wanchai Chinney Alliance Eng	T +852 2880 3888 F +852 2811 0974	Auckland	T +64 9 274 5353 F +64 9 274 5295	
Iceland		Norway		
Reykjavik Poulson	T +354 1 686499 F +354 1 680539	Oslo FR Ramström AS	T +47 64 860 800 F +47 64 867 670	
Indonesia		Peoples Republic of China		
Jakarta Pusat PT Eltab	T +62 21 633 4149 F +62 21 633 5753	Dalian BCW Electrics Corp. Ltd	T +86 411 8460 7748 F +86 411 8460 1008	
Jakarta	T +62 21 659 9051			
PT Berkat	F +62 21 629 4103			
Philippines		United Kingdom		
Manila Eastman Ind Supply Inc	T +632 804 0786 F +632 833 0388	Customer Service Centre	T +44 1484 557200 F +44 1484 557201	
Poland		Free fax order line	F 0800 028 7176	
Tarnow Tamel S.A.	T +48 14 632 11 33 F +48 14 621 96 64	Project Motor Sales	T +44 1484 557200 F +44 1484 548718	
Qatar		DC Motor Sales	T +44 121 698 3100 F +44 121 698 3241	
Doha Oriental Trading	T +97 442 3750 F +97 443 3573			
USA		United Arab Emirates		
Toll Free		Abu Dhabi Expert Engineering Co	T +971 2 6344518 F +971 2 6342845	
Vietnam		Dubai Danway LLC	T +971 434 73700 F +971 434 73232	
Ho Chi Minh City Ngoc Hong Trading		United Kingdom		
		Customer Service Centre	T +44 1484 557200 F +44 1484 557201	
		Free fax order line	F 0800 028 7176	
		Project Motor Sales	T +44 1484 557200 F +44 1484 548718	
		DC Motor Sales	T +44 121 698 3100 F +44 121 698 3241	

Every care has been taken to ensure the accuracy of the information contained in this publication, but, due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those illustrated and described in this publication

For the most recent version of any Brook Crompton catalogue/leaflet, please refer to www.brookcrompton.com

BROOK CROMPTON

Brook Crompton
St Thomas' Road, Huddersfield
West Yorkshire HD1 3LJ UK
Tel: +44 (0) 1484 557200
Fax: +44 (0) 1484 557201
E-mail: refer to website
Internet: www.brookcrompton.com

Printed in England

dh0604 2602E issue 1e

© Copyright 2006, Brook Crompton. All rights reserved.